



FHEX26




Mini Wet Location LED Exit Sign

- Maintenance-free, NiCd battery
- Energy Saving LED
- Double face
- Universal knock-out chevrons
- Corrosion and impact resistant thermoplastic housing
- Universal mounting bracket included.
- Optional Remote Capable version offers up to an additional 3W for 90 minutes
- Compatible with FHEM12RH (See Specification Sheet for details)
- Sealed and gasketed housing
- Ideal for: stores, offices, hospitals and school corridors
- Optional cold weather heater allows use in temperatures down to -20°C


General Specifications

	FHEX26G	FHEX26R	FHEX26RRC	FHEX26GRC	FHEX26RHTR	FHEX26GHTR
Input Voltage	120/277VAC					
Input Current (120V)	28.1mA	20.7mA	36mA	36.4mA	18mA	27mA
Input Current (277V)	12.31mA	8.9mA	16.4mA	15.95mA	10mA	14mA
Input Power (120V)	3.06W	1.89W	4.15W	4.13W	1.86W	3.14W
Input Power (277V)	3.08W	1.86W	4.36W	4.19W	1.86W	3.14W
Operating Frequency	60Hz					
Operating Ambient Temperature Range (Ta)	0°C to 40°C / 32°F to 104°F -20°C to 50°C / 68°F to 122°F with heater option					
Overall Size	12.625" L x 8.125" H x 2.5" W					
Emergency Operation	90 minutes					
Compliance	UL 924 Listed CEC Title 20 Compliant Wet Location					
Warranty	5 years from the date of manufacture					

Mechanical Data

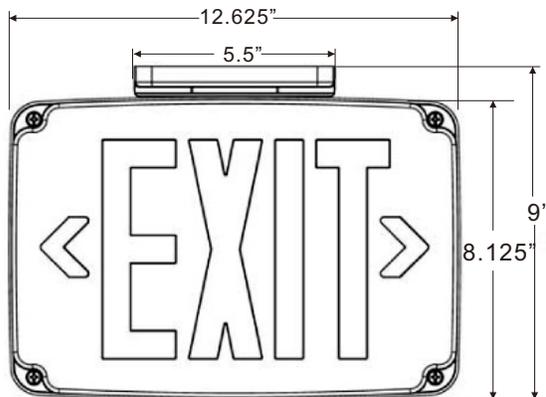

FRONT VIEW

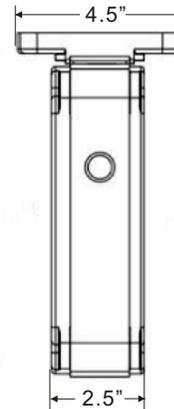

SIDE VIEW

NOTE:
1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

Part Number Matrix

FHEX26 **R** **RC**

Letter Color
R = Red
G = Green

Options
RC = Remote Capable
HTR = Heater*

*Heater option cannot be combined with remote capability