


4

5

DWG NO. 1000537 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

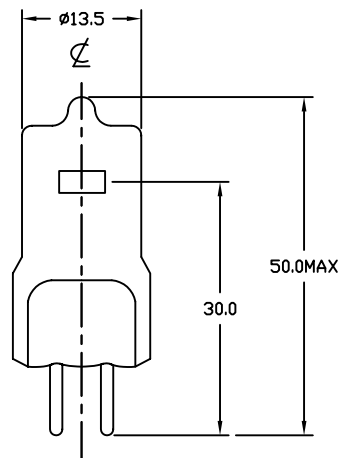

## NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
<b>LIST OF MATERIALS</b>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 5440 Cerritos Avenue Cypress, CA 90630	
DECIMALS .X ± - .XX ± - .XXX ± -		APPROVALS			
ANGLES ± -		DATE		TITLE	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN R.AMPARO 08/20/99			
MATERIAL		CHKD D.GILCZYNSKI 09/20/99		FHY JC24V-150W	
COMPOSITE		ENGR			
FINISH		MFG		SIZE	
		QUAL		CODE IDENT NO.	
		DSGN ACTVY		FHY	
		GOVT ACTVY		DWG NO.	
				1000537	
				SCALE	
				NONE	
				WEIGHT	
				SHEET	
				1 OF 1	

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	150 W
TOTAL LUMEN	3700 Lm
COLOR TEMP.	3100 K
BASE TYPE	G6.35
AVERAGE LIFE	1000 HRS
FILAMENT TYPE	CBar6
BURN POSITION	BD/Hor

NEXT ASSY	USED ON

APPLICATION

4

3

1

2

1

CAD