

4


3

DWG NO. 1000545 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

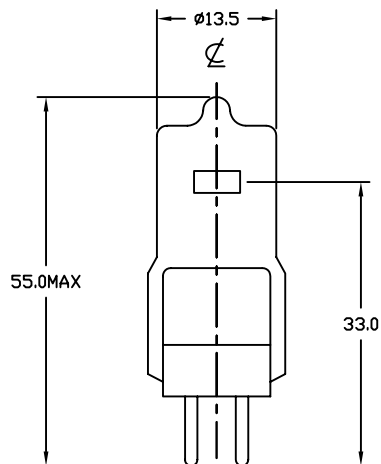

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	300 W
TOTAL LUMEN	10450 Lm
COLOR TEMP.	3500 K
BASE TYPE	GY6.35
AVERAGE LIFE	50 HRS
FILAMENT TYPE	CBar6
BURN POSITION	BD

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630	
DECIMALS .X ± -		APPROVALS			
.XX ± -		DATE		TITLE FLW JC24V-300W	
.XXX ± -		DRAWN R.AMPARO 08/19/99			
ANGLES ± -		CHKD D.GILCZYNSKI 08/19/99		SIZE B CODE IDENT NO. FLW DWG NO. 1000545	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		ENGR			
MATERIAL COMPOSITE		MFG		SCALE NONE WEIGHT SHEET 1 OF 1	
FINISH		QUAL			
		DSGN ACTVY			
		GOV'T ACTVY			

4

3

2

1

CAD