


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

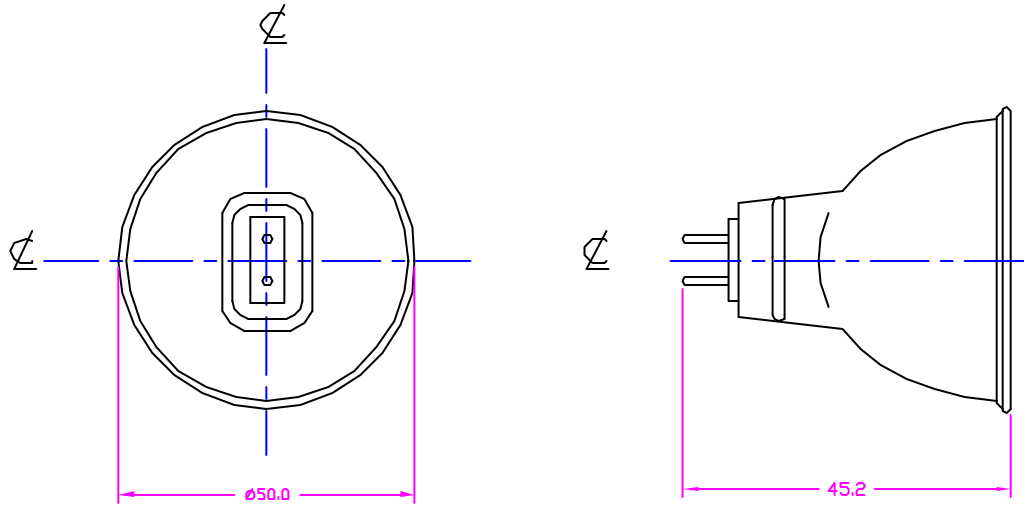

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
  2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
  3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	50W
COLOR TEMP	3000 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GJ5.3
BEAM ANGLE	60°
FILAMENT TYPE	C-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
<b>LIST OF MATERIALS</b>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 10550 Camden Dr. Cypress, CA 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES ±		DATE		TITLE <b>FNV/C/A/FG HALOGEN LAMP</b>	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN			
MATERIAL <b>COMPOSITE</b>		ENGR		SIZE <b>B</b>	
FINISH		MFG			
NEXT ASSY		QUAL		CODE IDENT NO.	
USED ON		DSGN ACTVY		DWG NO.	
APPLICATION		GOVT ACTVY		1000591	
SCALE			WEIGHT		SHEET
NONE					1 OF 1

4

3

1

4

3

2

1

CAD