


4

3

DWG NO. 1000647 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

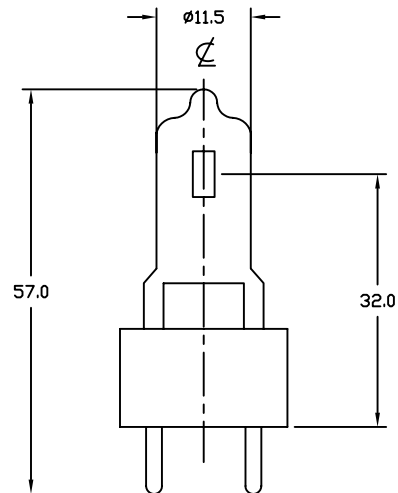

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
MATERIAL COMPOSITE		APPROVALS			
FINISH		DATE		TITLE GCA JCV120V-250WC	
		DRAWN R.AMPARO 09/02/99			
		CHKD D.GILCZYNSKI 09/02/99		SIZE B	
		ENGR		CODE IDENT NO. GCA	
		MFG		DWG NO. 1000647	
		QUAL		SCALE NONE	
		DSGN ACTVY		WEIGHT	
		GOV'T ACTVY		SHEET 1 OF 1	

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	250 W
TOTAL LUMEN	5880 Lm
COLOR TEMP.	3200 K
BASE TYPE	G5.3
AVERAGE LIFE	200 HRS
FILAMENT TYPE	CC-8
BURN POSITION	BD/Hor

NEXT ASSY	USED ON	APPLICATION

4

3

2

1

CAD