


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

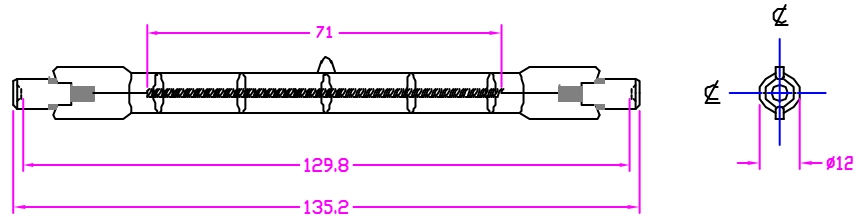

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	120 V
STARTING VOLTAGE	500 W
TOTAL LUMEN	11000 Lm
COLOR TEMP	3100 K
AVERAGE LIFE	100 HRS
BASE TYPE	R7s
BULB FINISH	CLEAR
FILAMENT TYPE	C-B
BURNING POSITION	Hor ±4°

NEXT ASSY	USED ON	APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritas Ave, Cypress, CA 90630 TITLE GDA, J120V-500WC2 DOUBLE ENDED HALOGEN LAMP		
DECIMALS	.X ± -	APPROVALS				DATE
	.XX ±	DRAWN	R.AMPARO			05/07/01
	.XXX ±	CHKD	J.COOPER			05/07/01
ANGLES	±	ENGR				
DRILLED HOLES PER AND 103B7 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		MFG				
MATERIAL		QUAL				
COMPOSITE		DRGN ACTVY				
		DDVT ACTVY				
FINISH		SCALE	NONE	WEIGHT		
		SHEET	1 OF 1			

4

3

1

D

D

C

C

B

B

A

A

4

3

2

1

CAD