
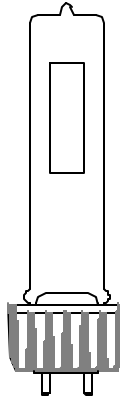


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

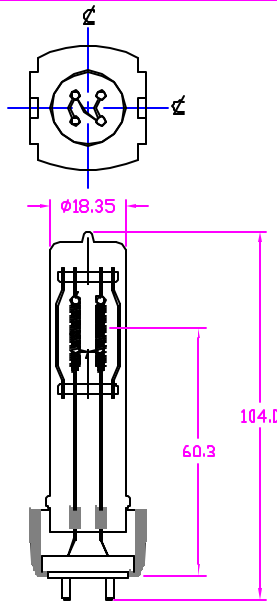

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES DRILLED HOLES PER AND 10367 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		USHIO AMERICA, INC. 5440 Carrifree Ave. Cypress, CA 90830	
			APPROVALS			DATE
DRAWN		R.AMPARO		05/15/01		
CHKD		J.COOPER		05/15/01		
ENGR						
MFG						
QUAL						
DSGN ACTVY						
GOVT ACTVY						
MATERIAL			TITLE			
COMPOSITE			HPL-375/115V, JS115V-375WC HALOGEN LAMP			
FINISH			SIZE	CODE IDENT NO.	DWG NO.	
			B		1000666	
			SCALE	WEIGHT	SHEET	
			NONE		1 OF 1	

CHARACTERISTICS	
VOLTAGE	115 V
WATTAGE	375 W
COLOR TEMP	3250 K
LUMENS	10540 Lm
FLAMENT	4-CB
AVERAGE LIFE	300 HRS
BASE	HEAT SINK
BURNING POSITION	ANY

NEXT ASSY	USED ON

APPLICATION

4

3

1

4

3

2

1

CAD