

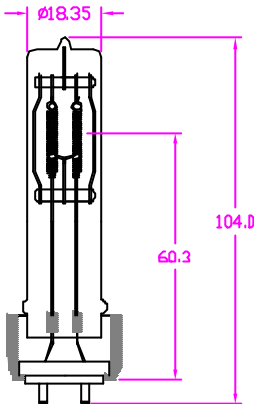


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 380°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	77 V
WATTAGE	530 W
COLOR TEMP	3250 K
LUMENS	18170 Lm
FILAMENT	4-C8
AVERAGE LIFE	300 HRS
BASE	HEAT SINK
BURNING POSITION	ANY

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritos Ave. Cypress, CA 90830 TITLE HPL-550/77V, JS77V-550WC HALOGEN LAMP	
MATERIAL COMPOSITE		APPROVALS			
FINISH		DATE			
APPLICATION		DRAWN R.AMPARO			
				DATE 05/15/01	
				DRAWN J.COOPER	
				DATE 05/15/01	
				MFG	
				QUAL	
				SIZE B	
				CODE IDENT NO.	
				DWG NO. 1000668	
				SCALE NONE	
				WEIGHT	
				SHEET 1 OF 1	

4 3 1

D

C

B

A

4 3 2 1

CAD