
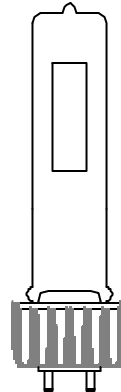
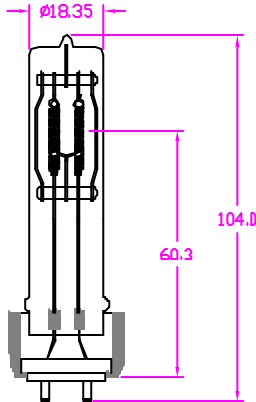


DWG NO. 1000672 BH 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 330°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12D V
WATTAGE	573 W
COLOR TEMP	3250 K
LUMENS	16520 Lm
FILAMENT	4-C8
AVERAGE LIFE	300 HRS
BASE	HEAT SHK
BURNING POSITION	ANY

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 5440 Carritos Ave. Cypress, CA 90830  TITLE HPL-575/120V, JS120V-575WC HALOGEN LAMP  SIZE B CODE IDENT NO. DWG NO. 1000672 SCALE NONE WEIGHT SHEET 1 OF 1	
DECIMALS .X ± -		APPROVALS			
.XX ±		DATE			
.XXX ±		DRAWN R.AMPARO 05/15/01			
ANGLES ±		CHKD J.COOPER 05/15/01			
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		ENGR			
MATERIAL		MFG			
COMPOSITE		QUAL			
FINISH		QBON ACTYV			
		QBVT ACTYV			