


DWG NO. 1003922^{REV 1}

REVISIONS

REV	DESCRIPTION	DATE	APPROVED

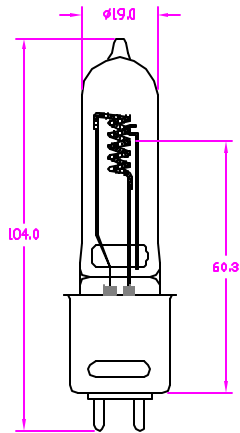

NOTES

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	115 V
WATTAGE	400 W
TOTAL LUMEN	10000 Lm
COLOR TEMP.	3200 K
AVERAGE LIFE	300 HRS
BASE TYPE	G8.5
FILAMENT TYPE	CC-8
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 10550 Comden Dr. Cypress, CA 90630 TITLE HX-400, JCV115V-400WCM HALOGEN LAMP		
DECIMALS .X ±		APPROVALS				DATE
.XX ±		DRAWN				09/07/00
.XXX ±		ENGR				09/07/00
ANGLES ±		CHKD		DATE		
DRILLED HOLES PER AND 10307		K.CORDERO		09/07/00		
REMOVE BURRS AND SHARP EDGES		ENGR		DATE		
ALL DIMENSIONS AFTER PLATING		MFG		DATE		
MATERIAL		QUAL		DATE		
COMPOSITE		DSGN ACTVY		DATE		
		MGT ACTVY		DATE		
FINISH		SCALE		NONE		
NEXT ASSY		USED ON		APPLICATION		
B		HX-400		1003022		
ANY		SCALE		NONE		
APPLICATION		WEIGHT		SHEET 1 OF 1		

4

3

1

4

3

2

1

CAD