


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

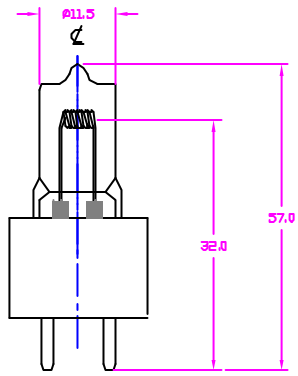

**NOTES:**

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 300°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	100 W
TOTAL LUMEN	2900 Lm
COLOR TEMP.	3300 K
BASE TYPE	G5.3
AVERAGE LIFE	200 HRS
FILAMENT TYPE	Coar <sup>®</sup>
BURN POSITION	BD/Her

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
<b>LIST OF MATERIALS</b>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 5440 Carritas Ave. Cypress, CA90630	
DECIMALS .X ± -		APPROVALS			
.XX ± -		DRAWN		08/20/99	<b>TITLE</b> GCC, JC12V-100WC5 HALOGEN LAMP
.XXX ± -		CHKD		09/20/99	
ANGLES ± -		ENGR			
DRILLED HOLES PER AND 103B7 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		MFG			
MATERIAL		QUAL		SIZE	
<b>COMPOSITE</b>		FINISH		CODE IDENT NOS	
		DRGN ACTVY		G	
		DDVT ACTVY		1000649	
NEXT ASSY		USED ON		SCALE	
APPLICATION				NONE	
				WEIGHT	
				SHEET	
				1 OF 1	

4

3

1

D

D

C

C

B

B

A

A

4

3

2

1

CAD