


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

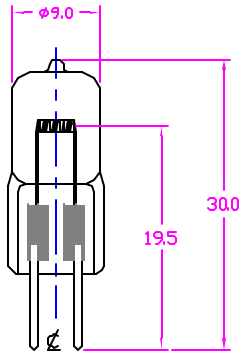

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	35 W
LUMEN OUTPUT	850 Lm
COLOR TEMP	2900 K
BULB FINISH	CLEAR
BASE TYPE	G4
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	C-8
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritos Ave. Cypress, Ca 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS DATE			
ANGLES		DRAWN R.AMPARO 02/15/01		TITLE JC12V-35WB/G4 HALOGEN LAMP	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CHECKS D.GILCZYNSKI 02/15/01			
MATERIAL COMPOSITE		ENGR		SIZE CODE IDENT NOS BWS NO.	
FINISH		DWT ACTVY		E 1000825	
		DVT ACTVY		SCALE NONE WEIGHT SHEET 1 OF 1	

4

3

1

4

3

2

1

CAD