


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

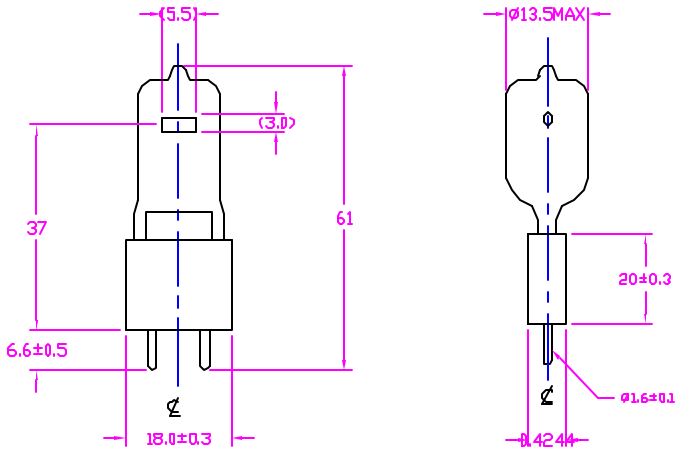

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 300°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	2+ V
WATTAGE	150 W
LUMEN OUTPUT	4800 Lm
COLOR TEMP.	3400 K
BASE TYPE	C8-35
AVERAGE LIFE	50 HRS
FILAMENT TYPE	C-B
BURN POSITION	BD/Hor.

APPLICATION	
NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS			
LIST OF MATERIALS								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritas Ave. Cypress, CA 90630				
DECIMALS	.X ± -	APPROVALS	DATE					
	.XX ± -	DRAWN	R.AMPARO	11/24/99	TITLE JC24V-150WL-H HALOGEN LAMP			
	.XXX ± -	CHECKED	D.GILCZYNSKI	11/24/99				
ANGLES	± -	ENGINEER			SIZE	CODE IDENT NOS.	DWG NO.	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		MATERIAL	COMPOSITE				1000843	
FINISH		FROM ACTVY			SCALE	NONE	WEIGHT	SHEET 1 OF 1
		GOVT ACTVY						

4

3

1

4

3

2

1

CAD