


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

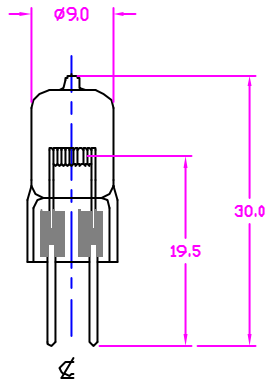

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
DESIGN VOLTS	0 V
DESIGN WATT	20 W
LUMEN OUTPUT	280 Lm
COLOR TEMP	2850 K
BASE TYPE	C4
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	C-6
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritas Ave. Cypress, CA 90630	
DECIMALS .X ± -		APPROVALS			
.XX ±		DRAWN		DATE	
.XXX ±		CHECKS		02/05/01	
ANGLES		ENDOR		TITLE	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		K.CORDERO		02/05/01	
MATERIAL		MFG		SIZE	
COMPOSITE		QUAL		CODE IDENT NOS	
FINISH		DRON ACTVY		1000866	
NEXT ASSY		DDEV ACTVY		SCALE	
USED ON		NONE		WEIGHT	
APPLICATION		NONE		SHEET	
				1 OF 1	

JC6V-20W/G4 C-6
HALOGEN LAMP

1000866

SCALE NONE WEIGHT SHEET 1 OF 1