


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

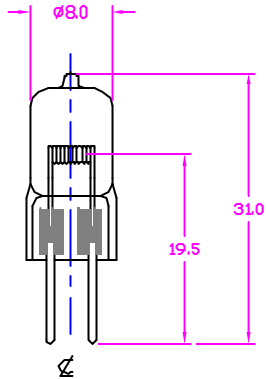

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
DESIGN VOLTS	8 V
DESIGN WATT	10 W
LUMEN OUTPUT	180 Lm
COLOR TEMP	2900 K
BASE TYPE	C4
AVERAGE LIFE	300 HRS
FILAMENT TYPE	C-8
BURN POSITION	ANY

NEXT ASSY	USED ON	APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritas Ave, Cypress, CA 90630			
DECIMALS .X ± -	.XX ±	APPROVALS				DATE	
ANGLES ±	.XXX ±	DRAWN				R.AMPARO	02/05/01
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CHKD				K.CORDERO	02/05/01
MATERIAL		COMPOSITE		TITLE			
		FINISH		JC6V-10WH3 HALOGEN LAMP			
		DRGN ACTVY		SIZE	CODE IDENT NOS.		
		DDVT ACTVY		8	1000857		
				SCALE	WEIGHT		
				NONE	SHEET 1 OF 1		

4

3

1

4

3

2

1

CAD