


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

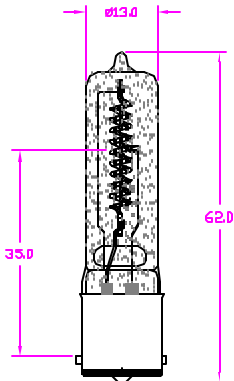

NOTES

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350 °C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	150 W
TOTAL LUMEN	2700 Lm
COLOR TEMP.	2800 K
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	CC-B
BASE TYPE	BA15d
BULB FINISH	FROSTED
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritos Ave. Cypress, CA90630	
DECIMALS	.X ± -	APPROVALS			
	.XX ±	DRAWN		R.AMPARO	05/03/01
	.XXX ±	CHKD		J.COOPER	05/03/01
ANGLES	±	ENGR			
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		MFG			
MATERIAL		QUAL		TITLE ETF, JCV120V-150WGBF HALOGEN LAMP	
COMPOSITE		FINISH			
FINISH		DRGN ACTVY		SIZE	CODE IDENT NO.
		DDVT ACTVY		B	ETF
				SCALE	WEIGHT
				NONE	
				SHEET	1 OF 1

NEXT ASSY	USED ON	APPLICATION

4

3

1

4

3

2

1

CAD