


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

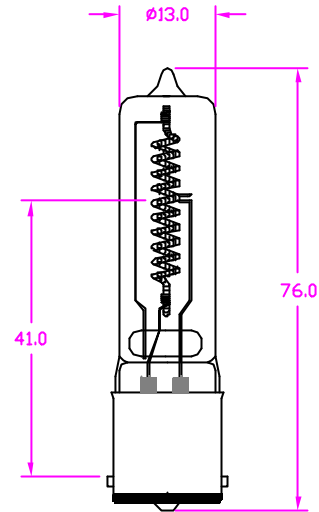

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350 °C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	250 W
TOTAL LUMEN	5000 Lm
COLOR TEMP.	3000 K
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	CC-B
BASE TYPE	BA15d
BULB FINISH	CLEAR
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 5440 Cerritos Ave. Cypress, CA90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES ±		DATE		TITLE <b>ESS, JCV120V-250WGB HALOGEN LAMP</b>	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN			
MATERIAL <b>COMPOSITE</b>		ENGR		SIZE <b>B</b>	
FINISH		MFG			
NEXT ASSY		QUAL		CODE IDENT NO. <b>ESS</b>	
USED ON		DSGN ACTVY			
APPLICATION		GOVT ACTVY		DWG NO. <b>1000365</b>	
		SCALE		SHEET <b>1 OF 1</b>	
		WEIGHT			
				NONE	

4

3

1

4

3

2

1

CAD