


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

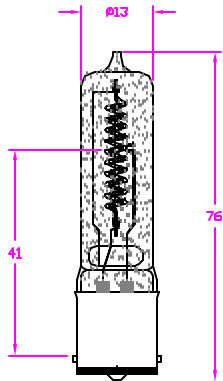

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 360 °C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	250 W
TOTAL LUMEN	4800 Lm
COLOR TEMP.	3000 K
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	CC-B
BASE TYPE	BA15d
BULB FINISH	FROSTED
BURN POSITION	ANY

NEXT ASSY	USED ON	APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NDL		USHIO AMERICA, INC. 3440 Carritos Ave. Cypress, CA90630	
DECIMALS	X ± -	APPROVALS			
	.XX ±	DRAWN		R. AMPARO	D5/03/01
	.XXX ±	CHKD		J. COOPER	D5/03/01
	±	ENGR			
ANGLES		MFG			
DRILLED HOLES PER AND 10497 REMOVE BURRS AND SHARP EDGES		QUAL			
ALL DIMENSIONS AFTER PLATING		FINISH			
MATERIAL		DRGN ACTVY			
COMPOSITE		GOVT ACTVY			
TITLE		SIZE	CODE IDENT NDL	DWG NDL	
ETB, JCV120V-250WGBF HALOGEN LAMP		B	ETB	1000372	
SCALE		WEIGHT	SHEET		1 OF 1
NONE					

4

3

1

4

3

2

1

CAD