



4

3

DWG NO. 1000482 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

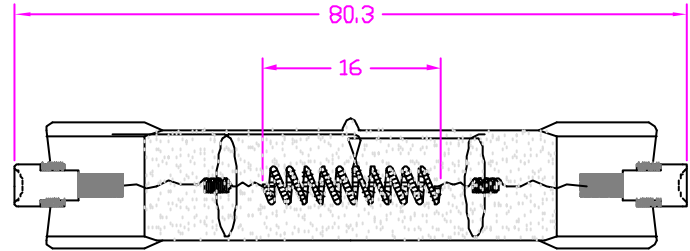

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	650 W
COLOR TEMP	3200 K
LUMENS	16000 Lm
AVERAGE LIFE	100 HRS
FILAMENTTYPE	CC-B
BASE TYPE	R7s-1B
BULB FINISH	FRDSTED
BURN POSITION	ANY

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES ±		DATE		TITLE FBX, JPD120V-650WCF DOUBLE ENDED HALOGEN LAMP	
DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN			
MATERIAL COMPOSITE		ENGR			
FINISH		MFG			
		QUAL		SIZE	
		DSGN ACTVY		CODE IDENT NO.	
		GOVT ACTVY		DWG NO.	
				SCALE	
				WEIGHT	
				SHEET	
				1 OF 1	

4

3

2

1

CAD