

## Features & Benefits

- Shatterproof Nano Plastic Tube
- NSF2 Rated No rewiring needed
- Works with fluorescent electronic ballast (Instant Start, Programmed Start, and Dimming)\*
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- No Mercury, No UV
- Dimmable
- Compatible with controls and sensors
- Works in cold temperature applications
- 5 Year Warranty
- Super Wide View Angle
- High Performance Plastic Series



## RetroFlex™


LED T5 LAMP • Simplicity.

Direct Replacement of Fluorescent  
Commercial Grade LED T5 Lamp

## Specification Data

Order Code	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	Life	DLC
L24T5/830/12P-EB	24"	12W	14W	3000K	1500	83	240°	124	50,000	No
L24T5/835/12P-EB	24"	12W	14W	3500K	1500	83	240°	124	50,000	No
L24T5/840/12P-EB	24"	12W	14W	4000K	1500	83	240°	124	50,000	No
L24T5/850/12P-EB	24"	12W	14W	5000K	1500	83	240°	124	50,000	No

## Wiring Diagram

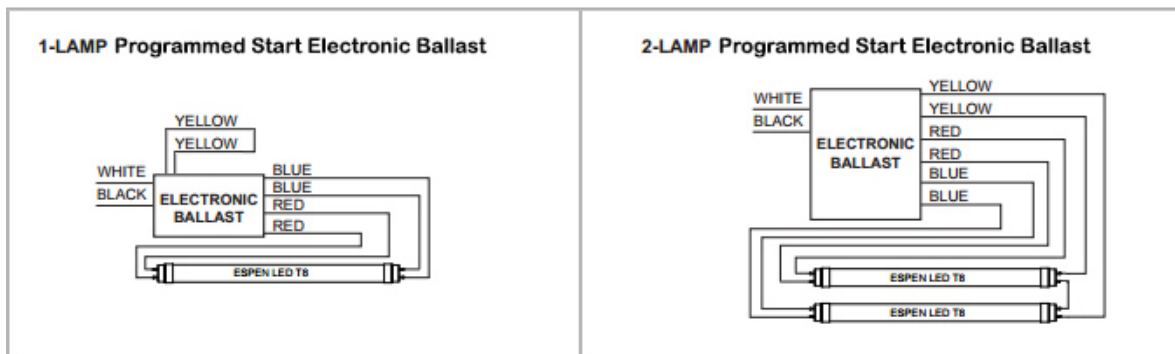

\* EMERGENCY BALLAST RESTRICTIONS

\* Compatible with Espen battery backup and/or emergency ballast.

\* Please refer to "Ballast Compatibility List" for a list of ballasts compatible with this lamp.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.