

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- No Mercury, No UV
- Compatible with controls and sensors
- Works in cold temperature applications
- Full Glass Design
- Wide View Angle, 120
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS




RetroFlex™
LED T5 LAMP • Simplicity.
Commercial Grade LED T5 Lamp

Specification Data

Order Code	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L24T5HO/835/9G-EB-AC	24 in	9W	12W	3500K	960	83	240	106	80	50000	No
L24T5HO/840/9G-EB-AC	24 in	9W	12W	4000K	960	83	240	106	80	50000	No
L24T5HO/850/9G-EB-AC	24 in	9W	12W	5000K	960	83	240	106	80	50000	No
L24T5HO/830/9G-EB-AC	24 in	9W	12W	3000K	960	83	240	106	80	50000	No

Wiring Diagram

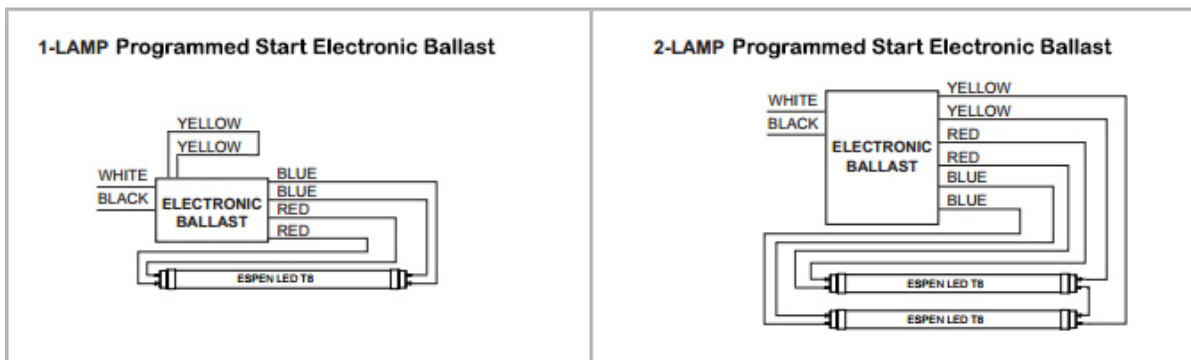

* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.

* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

Copyright © 2018 ESPEN Technology Inc. All Rights Reserved