

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- No Mercury, No UV
- Compatible with controls and sensors
- Works in cold temperature applications
- Full Glass Design
- Super Wide View Angle, 240
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS




RetroFlex™
LED T5 LAMP • Simplicity.
Commercial Grade **LED T5 Lamp**

Specification Data


Order Code	Length	Lamp Wattage	System Wattage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L48T5HE/835/13G-EB-AC	48 in	13W	16W	3500K	1800	83	240	135	115	50000	Yes
L48T5HE/840/13G-EB-AC	48 in	13W	16W	4000K	1800	83	240	135	115	50000	Yes
L48T5HE/850/13G-EB-AC	48 in	13W	16W	5000K	1800	83	240	135	115	50000	Yes
L48T5HE/830/13G-EB-AC	48 in	13W	16W	3000K	1800	83	240	135	115	50000	Yes

Wiring Diagram

1-LAMP Programmed Start Electronic Ballast

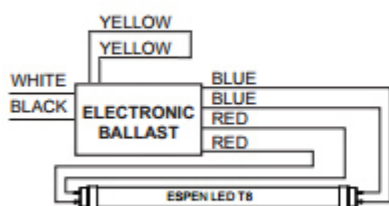

2-LAMP Programmed Start Electronic Ballast

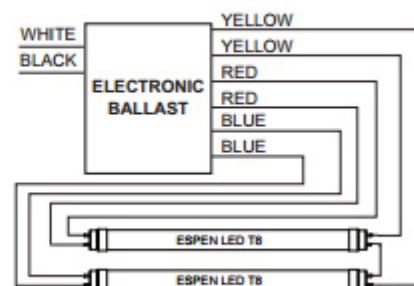

* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.



* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.