

## Features & Benefits

- No rewiring needed
- Works with fluorescent electronic ballast (Instant Start and Programmed Start)
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Works with dimming ballast
- Compatible with controls and sensors
- Works in cold temperature applications
- Glass tube for superior optical performance
- 5 Year Warranty




**RetroFlex™**  
LED T8 LAMP • Simplicity.  
Commercial Grade LED T8 Lamp

## Specification Data

| Order Code       | Length | Power | Input Voltage | CCT   | Initial Lumens | CRI | Beam Angle | Lamp Efficacy | System Efficacy | Life   |
|------------------|--------|-------|---------------|-------|----------------|-----|------------|---------------|-----------------|--------|
| L48T8/850/22W-EB | 48     | 22    | 300-630V      | 5000K | 2200           | 83  | 240        | 115           | 100             | 50,000 |
| L48T8/840/22W-EB | 48     | 22    | 300-630V      | 4000K | 2200           | 83  | 240        | 115           | 100             | 50,000 |
| L48T8/835/22W-EB | 48     | 22    | 300-630V      | 3500K | 2200           | 83  | 240        | 115           | 100             | 50,000 |

## PRODUCT SPECIFICATIONS

### Photometric Data

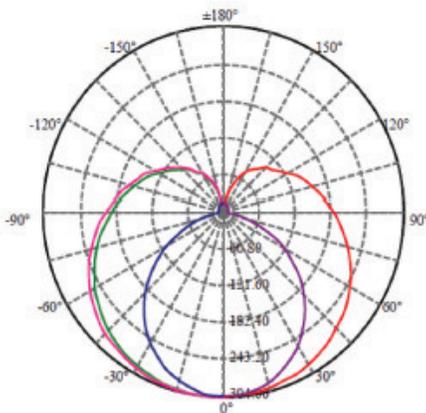

C195(Max) \_\_\_\_\_

C0 \_\_\_\_\_

C180 \_\_\_\_\_

C90 \_\_\_\_\_

C270 \_\_\_\_\_

### Wiring diagram

\* Please check ballast compatibility list before installation.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.