

Features & Benefits

-
-
-
-
-
-
-
-
-
-

Long life | High CRI
Instant on, no delay
Convenient and quick installation

Compatible with controls and sensors
Works in cold temperature applications
High performance plastic series
5 Year Warranty
Assembled in USA



* EMERGENCY BALLAST RESTRICTIONS




UniFlex™

Commercial Grade LED T8 Lamp

Specification Data

Order Code	Length	Input Voltage	Power Direct AC	Power w/ Ballast	CCT	Lumen	CRI	Beam Angle	Lamp Efficacy Direct AC	System Efficacy w/ Ballast	Life
LB31T8U/830/13P-AB BAA/TAA	24	120-277V	13	16	3000K	1800	83	240	138	112	50000
LB31T8U/835/13P-AB BAA/TAA	24	120-277V	13	16	3500K	1800	83	240	138	112	50000
LB31T8U/840/13P-AB BAA/TAA	24	120-277V	13	16	4000K	1900	83	240	146	118	50000
LB31T8U/850/13P-AB BAA/TAA	24	120-277V	13	16	5000K	2000	83	240	153	125	50000

Wiring Diagram

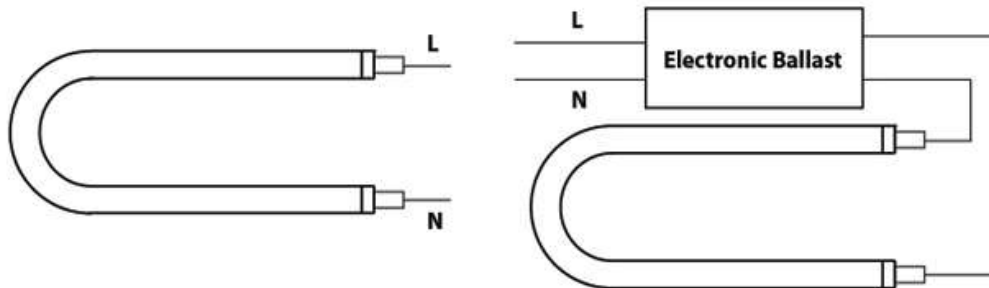

DLC Information

Order Code	DLC Product ID	DLC Product Model	DLC Product Version
LB31T8U/830/13P-AB BAA/TAA	N/A	N/A	N/A
LB31T8U/835/13P-AB BAA/TAA	N/A	N/A	N/A
LB31T8U/840/13P-AB BAA/TAA	PLWMGE5E6TC0	LB31T8U/840/13P-AB	5
LB31T8U/850/13P-AB BAA/TAA	PLIRLCNDPC5X	LB31T8U/850/13P-AB	5