

GENERAL INFORMATION

LED Driver Type	Constant Current (Class2)
Maximum Wattage	10 Watts
Input Voltage	120 VAC ± 10% Dedicated
Input Frequency	50/60Hz

CASE STYLE A: POLYCARBONATE



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
Non-Dimming Models									
10W	300mA	6 - 33 VDC	Non-Dimming	120 VAC	13W	0.30A	>0.50	77%	LC10-0300N-120-A
	330mA	9 - 30 VDC	Non-Dimming	120 VAC	13W	0.21A	>0.50	77%	LC10-0330N-120-A
	350mA	8 - 30 VDC	Non-Dimming	120 VAC	13W	0.21A	>0.50	77%	LC10-0350N-120-A
	380mA	7 - 28 VDC	Non-Dimming	120 VAC	13W	0.21A	>0.50	74%	LC10-0380N-120-A

PRODUCT FEATURES


- Short circuit and overload protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P - O/P 2kVAC
- Minimum start temp: -40°C
- Surge voltage rating: L-N 2kV

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) consumer limits



MECHANICAL SPECIFICATIONS: CASE STYLE A

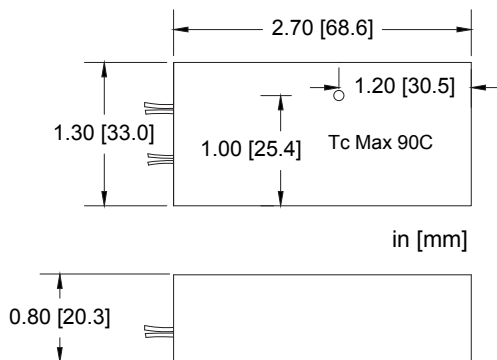

DIMENSIONS [IN/MM]

Length:	2.70 [68.6]
Width:	1.30 [33.0]
Height:	0.80 [20.3]

WIRING INFORMATION

Input:	12", Black (L), White (N) #18AWG
Output:	12", Red (+), Blue (-) #18AWG

PACKAGING INFORMATION

Weight:	3.5oz
Quantity:	100pc/carton

WARRANTY

- 5 year limited warranty

RELATED PRODUCT

- Case Style C - 4.8" x 1.3" x 0.8"