



LED Lamps - General Purpose



Selectable LED A-Line Lamps

Current's Selectable A-Line LED Lamps feature the ability to cover five common color temperatures with a single lamp. Use the built-in switch to select the desired color temperature, no tool required.



SpectraChoice™

PERFORMANCE HIGHLIGHTS:

Selectable LED A-Line Lamps	
Light Output:	Up to 1,600 Lumens
CRI:	90
Selectable CCT:	2700K/3000K/3500K/4000/5000K
Input Voltage:	120
Efficiency:	Up to 107 LPW
Wattage:	6W, 10W, 13W, 15W
Life:	15,000 hours L70
Temperature Rating:	-20°C to 45°C
Location Rating:	Damp

FEATURES:

Color Temperature Selectability:

- SpectraChoice™: five color temperature levels that can be adjusted with a built-in switch, no tool required
- Lamps are offered in 40, 60, 75 & 100W incandescent equivalent lumens
- 15,000 hours rated life (L70)
- High Color Rendering (90 CRI) & CEC Title 20 Compliant
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

LIMITED WARRANTY

5 years

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

BENEFITS:

- Energy + Cost Savings
- Use one lamp for many applications, simplifying project management by streamlining BOMs
- One lamp can replace many, greatly reducing inventory
- One lamp can be used to match the color in a variety of spaces, reducing stock and potential for color mismatch
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent and halogen light sources



Selectable **LED Lamps**

Do more with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



LED Lamps - General Purpose

Selectable LED A-Line Lamps

CUSTOMER NAME _____


PROJECT NAME _____

DATE _____

NOTES _____



SpectraChoice™

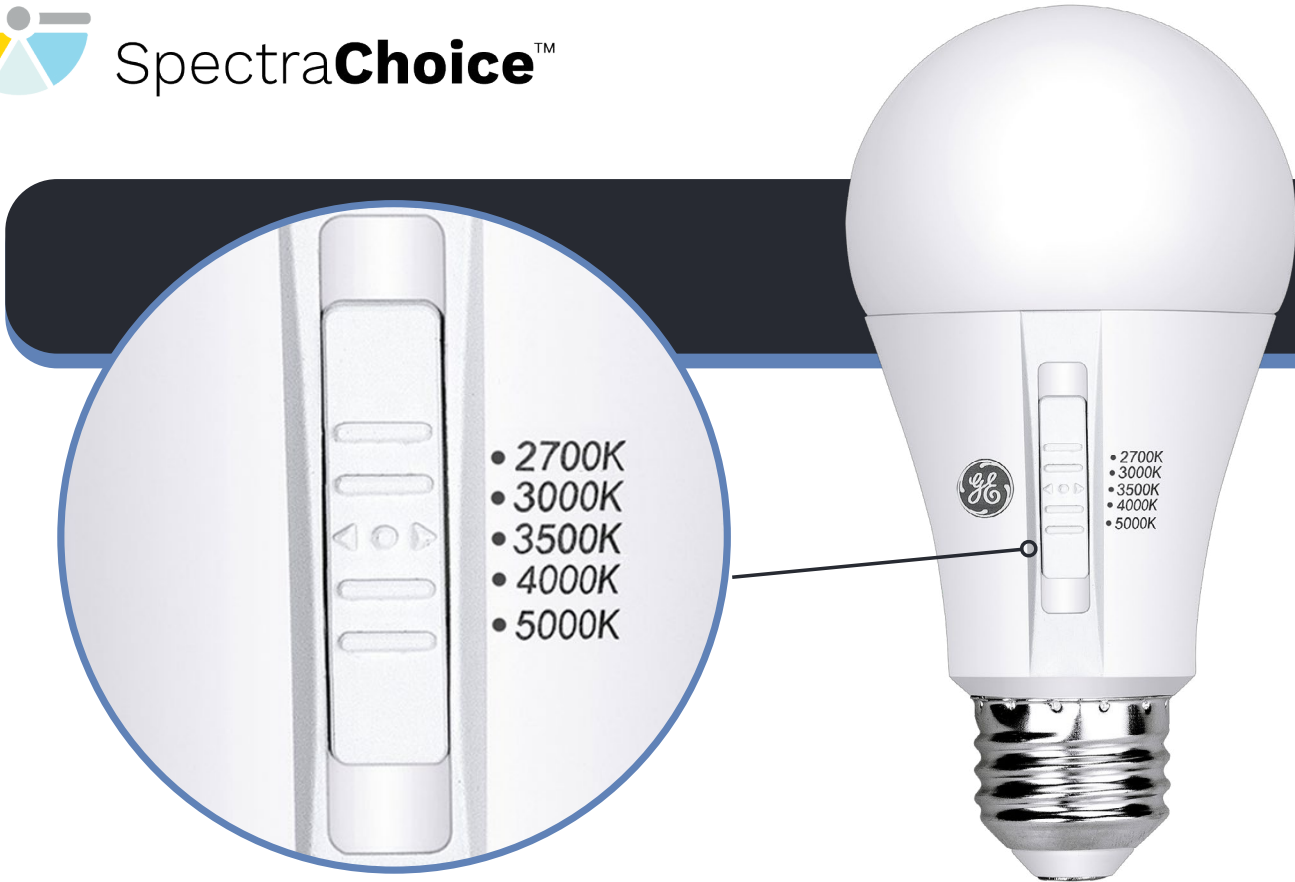

Selectable SpectraChoice™ A-Line Lamps (Dimmable)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (In)	Lumens (Initial) ³	Selectable Color Temp. (Initial)*	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
A-Line SpectraChoice™ Selectable Color Temperature															
A19	E26	6	93313531	LED6DA19/9SC/E	120	24	4.3	480	2700K* 3000K 3500K 4000K 5000K	90	40	15,000	Yes	Damp, Enclosed	White, CEC Title 20
A19	E26	10	93313549	LED10DA19/9SC/E	120	24	4.3	800	2700K* 3000K 3500K 4000K 5000K	90	60	15,000	Yes	Damp, Enclosed	White, CEC Title 20
A19	E26	13	93313543	LED13DA19/9SC	120	24	4.7	1100	2700K* 3000K 3500K 4000K 5000K	90	75	15,000	Yes	Damp	White, CEC Title 20
A19	E26	15	93313537	LED15DA19/9SC	120	24	4.7	1600	2700K* 3000K 3500K 4000K 5000K	90	100	15,000	Yes	Damp	White, CEC Title 20

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

* Default color temperature setting is 2700K