



LED Lamps - HID



Ballast Bypass - Ordinary Locations

LED replacement for HID lamps leverage the low energy and long life of LED. The existing fixture is wired to bypass the ballast, which reduces energy use and eliminates the need to check ballast compatibility. Additional maintenance savings are realized by removing costs associated with purchasing and installing ballasts.

PERFORMANCE HIGHLIGHTS:

| Ballast Bypass - Ordinary Locations | |
|-------------------------------------|------------------------------|
| Light Output: | 3,000 - 85,000 Lumens |
| CRI: | 70 |
| CCT: | 3000K, 3500K, 4000K, 5000K |
| Input Voltage: | 120-277V; 120-347V; 277-480V |
| Efficiency: | Up to 180 LPW |
| Wattage: | 21W-470W |
| Life: | 50,000 |
| Temperature Rating: | -40°C to +50°C |
| Location Rating: | Damp |
| Fixtures: | Open or Enclosed |

LIMITED WARRANTY

5 years

FEATURES:

- 3.3X longer life than metal halide (50,000 vs 15,000 hours)
- Uses 60-75% less energy, providing similar light output
- In-line misapplication fuse kit included
- Tether kit included with ED18, ED23.5, ED28, ED37 & BT56
- Horizontal support kit included with ED37 & BT56
- Matches ANSI length & diameter of HID lamp shape
- These lamps are energy efficient, contain no lead or mercury and are compliant with material restriction requirements of RoHS

BENEFITS:

- **Energy + Cost Savings:** an LED lamp saves in energy costs over the rated life of the lamp vs. a standard HID lamp. See energy savings chart below.
- Ballast bypass (Type B) wiring eliminates costs and hassle associated with replacing ballasts

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

Energy Savings switching from HID to Type B LED Lamps

| Lamp Replacement Wattage | HID System Wattage | LED System Wattage | System Energy Savings (W) | System Energy Cost Savings Over Life of Lamp* |
|--------------------------|--------------------|--------------------|---------------------------|---|
| 1000 | 1075 | 450 | 625 | \$3,437 |
| 1000 | 1075 | 270 | 805 | \$4,427 |
| 750 | 825 | 200 | 625 | \$2,553 |
| 400 | 460 | 150 | 310 | \$1,705 |
| 250 | 290 | 115 | 175 | \$962 |
| 175 | 210 | 80 | 130 | \$715 |
| 100 | 120 | 50 | 70 | \$385 |

*Based on energy rates at 0.11 per kWh over the life of the lamp

LED Lamps for Hazardous Locations are also available - See Spec Sheet LEDL089 & White Paper LEDL126 for more information.




Ballast Bypass for Ordinary Locations

| | |
|---------------|-------|
| CUSTOMER NAME | |
| PROJECT NAME | |
| DATE | NOTES |

GE LED Lamps for HID Replacement utilize a proprietary design with active cooling, which allows for high output from a compact size. The length and diameter match HID ANSI profiles. These lamps feature omnidirectional light output, with similar distribution to traditional HID lamps. This enables GE LED Lamps to fit in a variety of fixtures while providing equivalent light levels to HID. All of the GE LED Lamps in this category are Type B, which means the fixture is re-wired to bypass the ballast.

Lamp Drawings (not drawn to scale)

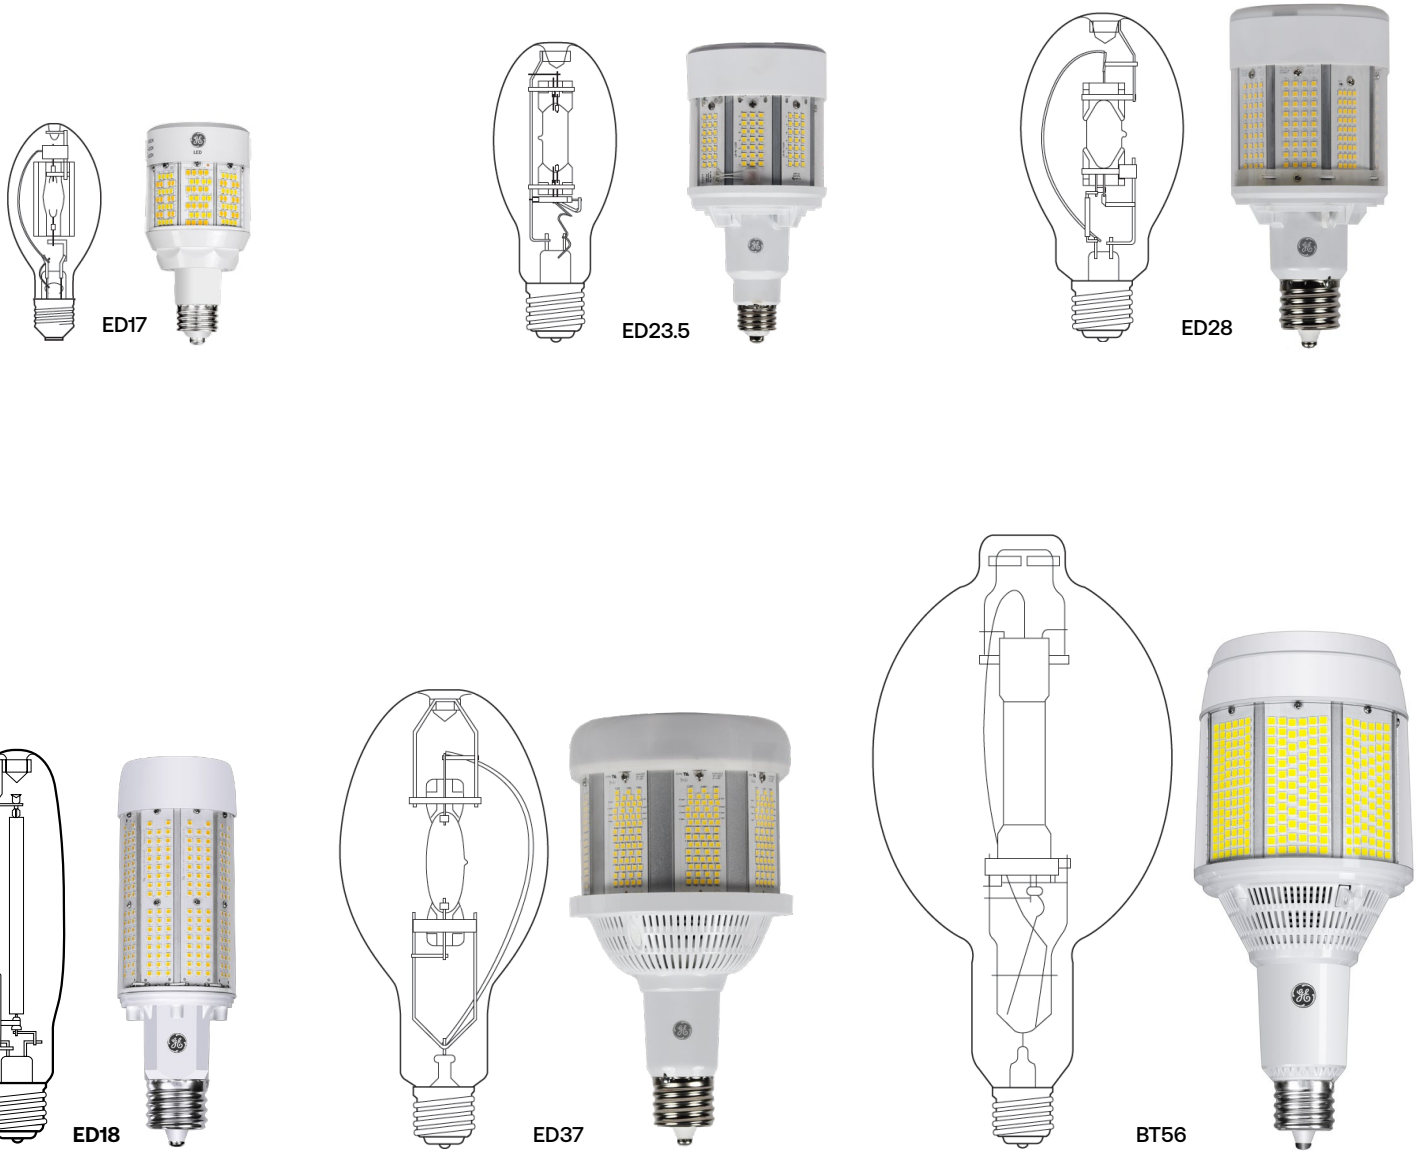



Ballast Bypass for Ordinary Locations

| | |
|---------------|-------|
| CUSTOMER NAME | |
| PROJECT NAME | |
| DATE | NOTES |

NEMA LED HID Wattage Equivalency

In February of 2021, the National Electrical Manufacturers Association (NEMA) published NEMA LL 10-2020 *Replacing HID Lamps with LED Lamps: Light Output Equivalency Claims*. Current uses this Standard for LED products replacing HID lamps, meeting or exceeding the minimum LED light output for equivalency claims. The LED wattage equivalency varies based on the type of HID lamp being replaced - Metal Halide (MH) or High Pressure Sodium (HPS).

| Metal Halide Lamp Wattage (W) | Metal Halide Initial Light Output (lm) | Minimum LED Lamp Initial Light Output (lm) | Current LED Ordinary Location Retrofit Lamps | Current LED Ordinary Location Selectable Retrofit Lamps | Current LED Hazardous Location Retrofit Lamps |
|-------------------------------|--|--|--|---|---|
| 50 | 3,200 | 2,000 | LED21ED17 | LED/LC/ED17 | LED21ED17/HAZ |
| 70 | 5,200 | 3,000 | LED21ED17 | LED/LC/ED17 | LED21ED17/HAZ |
| 100 | 8,100 | 5,000 | LED35ED17; LED45ED17 | LED/LC/ED17 | LED35ED17/HAZ; LED45ED17/HAZ |
| 150 | 12,000 | 7,500 | LED50ED23.5 | LED/LC/ED23 | |
| 175 | 11,000 | 7,000 | LED45ED17; LED50ED23.5 | LED/LC/ED17; LED/LC/ED23 | |
| 250 | 19,100 | 12,000 | LED80ED23.5 | LED/LC/ED28 | LED80ED23.5/HAZ |
| 320 | 25,600 | 16,500 | LED115ED28 | LED/LC/ED28 | |
| 350 | 28,400 | 18,000 | LED115ED28 | LED/LC/ED28 | |
| 360 | 29,400 | 19,000 | LED150ED28 | LED/LC/ED28 | LED150ED28/HAZ |
| 400 | 33,100 | 21,500 | LED150ED28; LED180ED18; LED200ED37 | LED/LC/ED28; LED/LC/ED37 | LED150ED28/HAZ |
| 750 | 72,300 | 46,500 | LED360ED37 | LED/LC/ED37 | |
| 1,000 | 100,280 | 65,000 | LED450BT56; LED470BT56 | LED/LC/ED37 | |

| HPS Lamp Wattage (W) | HPS Initial Light Output (lm) | Minimum LED Lamp Initial Light Output (lm) | Current LED Ordinary Location Retrofit Lamps | Current LED Ordinary Location Selectable Retrofit Lamps | Current LED Hazardous Location Retrofit Lamps |
|----------------------|-------------------------------|--|--|---|---|
| 50 | 4,500 | 2,500 | LED21ED17 | LED/LC/ED17 | LED21ED17/HAZ |
| 70 | 6,300 | 4,000 | LED35ED17 | LED/LC/ED17 | LED35ED17/HAZ |
| 100 | 9,500 | 6,000 | LED45ED17; LED50ED23.5 | LED/LC/ED17; LED/LC/ED23 | LED45ED17/HAZ |
| 150 | 13,000 | 8,500 | LED80ED23.5 | LED/LC/ED23 | LED80ED23.5/HAZ |
| 200 | 19,500 | 12,500 | | LED/LC/ED28 | |
| 250 | 26,000 | 17,000 | LED115ED28 | LED/LC/ED28 | |
| 310 | 33,200 | 21,500 | LED150ED28 | LED/LC/ED28 | LED150ED28/HAZ |
| 400 | 44,000 | 29,000 | LED180ED18; LED200ED37; LED270BT56 | LED/LC/ED37 | |
| 600 | 66,000 | 42,500 | LED360ED37 | LED/LC/ED37 | |
| 750 | 82,500 | 53,500 | LED450BT56 | LED/LC/ED37 | |
| 1,000 | 110,000 | 73,000 | LED470BT56 | | |



Ballast Bypass for Ordinary Locations


| | |
|---------------|-------|
| CUSTOMER NAME | |
| PROJECT NAME | |
| DATE | NOTES |

Current offers unmatched flexibility with Selectable LED HID Replacement Lamps. Select wattage and color temperature at the flick of a switch.

- Reduce & simplify inventory** - one lamp can replace many, reducing inventory dollars & storage space
- Optimize solutions & save** - adjust light output to the correct level & color for each application & reduce energy consumption
- Simplify projects & BOMs** - streamline product lists & take the guesswork out of which lamps are needed where



Select wattage (lumens) using built-in switch.

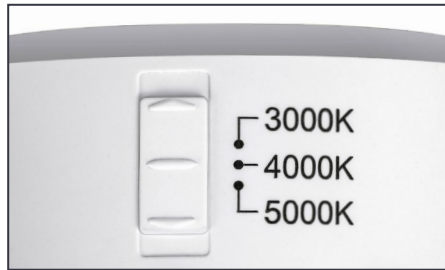

Select color temperature using built-in switch.



Even more versatility

Each E26 base lamp comes with a mogul base adapter.

Lamps may be used in E26 or E39/EX39 sockets.



Ballast Bypass for Ordinary Locations

| | |
|---------------|-------|
| CUSTOMER NAME | |
| PROJECT NAME | |
| DATE | NOTES |

Selectable LumenChoice® + SpectraChoice™ HID Replacements - Type B

| Bulb Shape | Base Type | Selectable Watts* | Order Code | Description | Volts | Carton Qty ² | MOL (in) | MOD (in) | Selectable Lumens (Initial) ⁷ | Selectable Color Temp.* (Initial) | CRI | Wattage Replacement ⁸ | Rated Life L70 (Hrs) ¹ | DLC ^{3,4} | Location Rating ^{5,6} |
|--|-----------|-------------------|------------|-------------------------|---------|-------------------------|----------|----------|--|-----------------------------------|-----|--|-----------------------------------|--------------------|--------------------------------|
| LED Replacement Lamp for HID - Ballast Bypass (Type B) | | | | | | | | | | | | | | | |
| ED17 | E26/EX39 | 21 35* 45 | 93303384 | LED/LC/ED17/7SC | 120-277 | 3 | 5.4 | 2.6 | 3,400 5,500* 7,000 | 3000K 4000K* 5000K | >70 | 50W HPS / 70W MH 70W HPS / 100W MH 100W HPS / 175W MH | 50,000 | - | Damp |
| ED17 | E26/EX39 | 21 35* 45 | 93314526 | LED/LC/ED17/7SC/120-347 | 120-347 | 3 | 5.4 | 2.6 | 3,400 5,500* 7,000 | 3000K 4000K* 5000K | >70 | 50W HPS / 70W MH 70W HPS / 100W MH 100W HPS / 175W MH | 50,000 | - | Damp |
| ED23.5 | E26/EX39 | 50 65 80* | 93312104 | LED/LC/ED23.5M/7SC | 120-277 | 3 | 7.8 | 3.7 | 8,200 10,500 12,500* | 3000K 4000K 5000K* | >70 | 100W HPS / 150W MH 150W HPS / 150W MH 150W HPS / 250W MH | 50,000 | - | Damp |
| ED23.5 | EX39 | 50 65 80* | 93312106 | LED/LC/ED23.5/7SC | 120-277 | 3 | 7.8 | 3.7 | 8,200 10,500 12,500* | 3000K 4000K 5000K* | >70 | 100W HPS / 150W MH 150W HPS / 150W MH 150W HPS / 250W MH | 50,000 | S-4V5NOG | Damp |
| ED28 | EX39 | 90 115 150* | 93312102 | LED/LC/ED28/7SC | 120-277 | 3 | 8.3 | 4.1 | 14,000 18,000 23,500* | 3000K 4000K 5000K* | >70 | 200W HPS / 250W MH 250W HPS / 350W MH 310W HPS / 400W MH | 50,000 | S-MB9GRL | Damp |

Selectable LumenChoice® HID Replacements - Type B

| Bulb Shape | Base Type | Selectable Watts* | Order Code | Description | Volts | Carton Qty ² | MOL (in) | MOD (in) | Selectable Lumens (Initial) ⁷ | Selectable Color Temp.* (Initial) | CRI | Wattage Replacement ⁸ | Rated Life L70 (Hrs) ¹ | DLC ^{3,4} | Location Rating ^{5,6} |
|--|-----------|--------------------|------------|-----------------|---------|-------------------------|----------|----------|--|-----------------------------------|-----|---|-----------------------------------|--------------------|--------------------------------|
| LED Replacement Lamp for HID - Ballast Bypass (Type B) | | | | | | | | | | | | | | | |
| ED37 | EX39 | 200 325 450* | 93311586 | LED/LC/ED37/740 | 277-480 | 3 | 11.3 | 5.6 | 35,000 53,500 68,000* | 4000K | >70 | 400W HPS / 400W MH 750W HPS / 750W MH 750W HPS / 1000W MH | 50,000 | S-ZZMLJT | Damp |
| ED37 | EX39 | 200 325 450* | 93311587 | LED/LC/ED37/750 | 277-480 | 3 | 11.3 | 5.6 | 35,000 53,500 68,000* | 5000K | >70 | 400W HPS / 400W MH 750W HPS / 750W MH 750W HPS / 1000W MH | 50,000 | S-25L41Q | Damp |

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = 1

³ E26 based products are not eligible for DLC. Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

⁴ Do not use with phase-cut dimmers. Dimming functions only with external Variac control devices.

⁵ UL 1993 Environmental Requirements for LED LAMPS

⁶ Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

⁷ Not suitable for air-tight explosive or hazardous fixtures.

⁸ Lumen levels correspond with wattage levels. Color temperature levels are independent of wattage & lumens.

⁹ Wattage Replacement levels correspond with wattage levels. Wattage Replacements based on NEMA Standards Publication LL 10-2020 *Replacing HID Lamps with LED Lamps: Light Output Equivalency Claims*.

* Default wattage and color temperature settings noted by "*" in tables above. Lumen levels correspond with wattage levels. Color temperature levels are independent of wattage & lumens.

Go to www.LED.com to learn more about Current's family of Selectable LED Lamps.



Selectable LED Lamps



LED Lamps - HID

Ballast Bypass for Ordinary Locations

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____

LED HID - Type B

| Bulb Shape | Base Type | Watts | Order Code | Description | Volts | Carton Qty ² | MOL (in) | MOD (in) | Lumens (Initial) | Color Temp. (Initial) | CRI | Wattage Replacement ⁸ | Rated Life L70 (Hrs) ¹ | DLC ^{3,4} | Location Rating ^{5,6} | | |
|--|-----------|-------|------------|-------------|-------------------------|-------------------------|----------------|----------|------------------|-----------------------|--------|----------------------------------|-----------------------------------|----------------------|--------------------------------|-------------------|----------|
| LED Replacement Lamps for HID - Ballast Bypass (Type B) | | | | | | | | | | | | | | | | | |
| | ED17 | E26 | 21 | 27729 | LED21ED17/740 | 120-277 | 3 | 5.4 | 2.6 | 3,000 | 4000K | >70 | 50W HPS / 70W MH | 50,000 | - | Damp | |
| | | E26 | 21 | 27732 | LED21ED17/750 | 120-277 | 3 | 5.4 | 2.6 | 3,000 | 5000K | >70 | 50W HPS / 70W MH | 50,000 | - | Damp | |
| | | E26 | 35 | 93112114 | LED35ED17/730 | 120-277 | 3 | 5.4 | 2.6 | 5,000 | 3000K | >70 | 70W HPS / 100W MH | 50,000 | - | Damp | |
| | | E26 | 35 | 27602 | LED35ED17/740 | 120-277 | 3 | 5.4 | 2.6 | 5,000 | 4000K | >70 | 70W HPS / 100W MH | 50,000 | - | Damp | |
| | | E26 | 35 | 27724 | LED35ED17/750 | 120-277 | 3 | 5.4 | 2.6 | 5,000 | 5000K | >70 | 70W HPS / 100W MH | 50,000 | - | Damp | |
| | | E26 | 45 | 93116975 | LED45ED17/835 | 120-277 | 3 | 5.4 | 2.6 | 6,000 | 3500K | >70 | 100W HPS / 100W MH | 50,000 | - | Damp | |
| | | E26 | 45 | 93148082 | LED45ED17/740 | 120-277 | 3 | 5.4 | 2.6 | 7,000 | 4000K | >70 | 100W HPS / 175W MH | 50,000 | - | Damp | |
| | | E26 | 45 | 93148081 | LED45ED17/750 | 120-277 | 3 | 5.4 | 2.6 | 7,000 | 5000K | >70 | 100W HPS / 175W MH | 50,000 | - | Damp | |
| | | E26 | 80 | 22768 | LED80ED23.5M/740 | 120-277 | 3 | 7.8 | 3.7 | 12,000 | 4000K | >70 | 150W HPS / 250W MH | 50,000 | - | Damp | |
| | | E26 | 80 | 93125008 | LED80ED23.5M/750 | 120-277 | 3 | 7.8 | 3.7 | 12,000 | 5000K | >70 | 150W HPS / 250W MH | 50,000 | - | Damp | |
| | | EX39 | 50 | 22679 | LED50ED23.5/740 | 120-277 | 3 | 7.8 | 3.7 | 7,500 | 4000K | >70 | 100W HPS / 150W MH | 50,000 | P2LJ433Z | Damp | |
| | | EX39 | 50 | 22739 | LED50ED23.5/750 | 120-277 | 3 | 7.8 | 3.7 | 7,500 | 5000K | >70 | 100W HPS / 150W MH | 50,000 | P9E7B4MB | Damp | |
| | | EX39 | 50 | 93154637 | LED50ED23.5/740/277/480 | 277-480 | 3 | 7.8 | 3.7 | 7,500 | 4000K | >70 | 100W HPS / 150W MH | 50,000 | S-QSEC3A | Damp | |
| | | EX39 | 50 | 93154639 | LED50ED23.5/750/277/480 | 277-480 | 3 | 7.8 | 3.7 | 7,500 | 5000K | >70 | 100W HPS / 150W MH | 50,000 | S-TGNWE4 | Damp | |
| | | EX39 | 80 | 93112196 | LED80ED23.5/730 | 120-277 | 3 | 7.8 | 3.7 | 12,000 | 3000K | >70 | 150W HPS / 250W MH | 50,000 | PDVKOYIV | Damp | |
| | | EX39 | 80 | 22635 | LED80ED23.5/740 | 120-277 | 3 | 7.8 | 3.7 | 12,000 | 4000K | >70 | 150W HPS / 250W MH | 50,000 | PHJ4LA1W | Damp | |
| | | EX39 | 80 | 22676 | LED80ED23.5/750 | 120-277 | 3 | 7.8 | 3.7 | 12,000 | 5000K | >70 | 150W HPS / 250W MH | 50,000 | PYL1MPL2 | Damp | |
| | | EX39 | 80 | 93154642 | LED80ED23.5/740/277/480 | 277-480 | 3 | 7.8 | 3.7 | 12,000 | 4000K | >70 | 150W HPS / 250W MH | 50,000 | S-TUGPZM | Damp | |
| | | EX39 | 80 | 93154640 | LED80ED23.5/750/277/480 | 277-480 | 3 | 7.8 | 3.7 | 12,000 | 5000K | >70 | 150W HPS / 250W MH | 50,000 | S-1FJ4CK | Damp | |
| | | | ED28 | EX39 | 115 | 93112197 | LED115ED28/730 | 120-277 | 3 | 8.3 | 4.1 | 18,000 | 3000K | >70 | 250W HPS / 350W MH | 50,000 | PE646DNU |
| | | ED28 | EX39 | 115 | 22622 | LED115ED28/740 | 120-277 | 3 | 8.3 | 4.1 | 18,000 | 4000K | >70 | 250W HPS / 350W MH | 50,000 | PONSAR2J | Damp |
| | | ED28 | EX39 | 115 | 22623 | LED115ED28/750 | 120-277 | 3 | 8.3 | 4.1 | 18,000 | 5000K | >70 | 250W HPS / 350W MH | 50,000 | PZFPZUL | Damp |
| | | ED28 | EX39 | 115 | 93139853 | LED115ED28/740/277/480 | 277-480 | 3 | 8.3 | 4.1 | 18,000 | 4000K | >70 | 250W HPS / 350W MH | 50,000 | PZ3P5P7U/PEQF29S7 | Damp |
| | | ED28 | EX39 | 115 | 93139854 | LED115ED28/750/277/480 | 277-480 | 3 | 8.3 | 4.1 | 18,000 | 5000K | >70 | 250W HPS / 350W MH | 50,000 | PY31MNAU/PCV74KSL | Damp |
| | | ED28 | EX39 | 150 | 93112198 | LED150ED28/730 | 120-277 | 3 | 8.3 | 4.1 | 23,500 | 3000K | >70 | 310W HPS / 400W MH | 50,000 | PAVD2D0E | Damp |
| | | ED28 | EX39 | 150 | 22611 | LED150ED28/740 | 120-277 | 3 | 8.3 | 4.1 | 23,500 | 4000K | >70 | 310W HPS / 400W MH | 50,000 | P53Y3N60 | Damp |
| | | ED28 | EX39 | 150 | 22613 | LED150ED28/750 | 120-277 | 3 | 8.3 | 4.1 | 23,500 | 5000K | >70 | 310W HPS / 400W MH | 50,000 | PIEL9LHG | Damp |
| | | ED28 | EX39 | 150 | 93139849 | LED150ED28/740/277/480 | 277-480 | 3 | 8.3 | 4.1 | 23,500 | 4000K | >70 | 310W HPS / 400W MH | 50,000 | PUQHU5LU/PYCNNIK7 | Damp |
| | | ED28 | EX39 | 150 | 93139850 | LED150ED28/750/277/480 | 277-480 | 3 | 8.3 | 4.1 | 23,500 | 5000K | >70 | 310W HPS / 400W MH | 50,000 | PY3DUSY0/POTANRAP | Damp |
| | | ED18 | EX39 | 180 | 93312096 | LED180ED18/730 | 120-277 | 3 | 9.7 | 3.0 | 30,000 | 3000K | >70 | 400W HPS / 400W MH | 50,000 | S-F26H3J | Damp |
| | | ED18 | EX39 | 180 | 93312098 | LED180ED18/740 | 120-277 | 3 | 9.7 | 3.0 | 30,000 | 4000K | >70 | 400W HPS / 400W MH | 50,000 | S-WN2HR8 | Damp |
| | | ED18 | EX39 | 180 | 93312100 | LED180ED18/750 | 120-277 | 3 | 9.7 | 3.0 | 30,000 | 5000K | >70 | 400W HPS / 400W MH | 50,000 | S-BG0B87 | Damp |
| | | BT56 | EX39 | 270 | 93153080 | LED270BT56/740/120/277 | 120-277 | 3 | 12.3 | 5.6 | 40,000 | 4000K | >70 | 400W HPS / 400W MH | 50,000 | PG8499V4 | Damp |
| | | BT56 | EX39 | 270 | 93153121 | LED270BT56/750/120/277 | 120-277 | 3 | 12.3 | 5.6 | 40,000 | 5000K | >70 | 400W HPS / 400W MH | 50,000 | PIZKSQ30 | Damp |
| | | BT56 | EX39 | 270 | 93095547 | LED270BT56/740 | 277-480 | 3 | 12.3 | 5.6 | 40,000 | 4000K | >70 | 400W HPS / 400W MH | 50,000 | PW00LOQL | Damp |
| | | BT56 | EX39 | 270 | 93095553 | LED270BT56/750 | 277-480 | 3 | 12.3 | 5.6 | 40,000 | 5000K | >70 | 400W HPS / 400W MH | 50,000 | PUZP8RV1 | Damp |
| | | ED37 | EX39 | 360 | 93122144 | LED360ED37/740 | 277-480 | 3 | 10.6 | 5.6 | 53,000 | 4000K | >70 | 600W HPS / 750W MH | 50,000 | P7WQGT4S | Damp |
| | | ED37 | EX39 | 360 | 93122166 | LED360ED37/750 | 277-480 | 3 | 10.6 | 5.6 | 53,000 | 5000K | >70 | 600W HPS / 750W MH | 50,000 | PK5HC9UY | Damp |
| | | BT56 | EX39 | 450 | 93153122 | LED450BT56/740/208/277 | 208-277 | 3 | 12.3 | 5.6 | 65,000 | 4000K | >70 | 750W HPS / 1000W MH | 50,000 | POIL8M4C | Damp |
| | | BT56 | EX39 | 450 | 93153123 | LED450BT56/750/208/277 | 208-277 | 3 | 12.3 | 5.6 | 65,000 | 5000K | >70 | 750W HPS / 1000W MH | 50,000 | PD4K2UXF | Damp |
| | | BT56 | EX39 | 450 | 93096445 | LED450BT56/740 | 277-480 | 3 | 12.3 | 5.6 | 65,000 | 4000K | >70 | 750W HPS / 1000W MH | 50,000 | PLNCOZ5Z | Damp |
| | | ED37 | EX39 | 450 | 93096547 | LED450BT56/750 | 277-480 | 3 | 12.3 | 5.6 | 65,000 | 5000K | >70 | 750W HPS / 1000W MH | 50,000 | PH8F9ZNF | Damp |
| | | ED37 | EX39 | 470 | 93303389 | LED470BT56/740 | 277-480 | 3 | 12.8 | 5.6 | 85,000 | 4000K | >70 | 1000W HPS / 1000W MH | 50,000 | S-E56HRP | Damp |
| | | ED37 | EX39 | 470 | 93303388 | LED470BT56/750 | 277-480 | 3 | 12.8 | 5.6 | 85,000 | 5000K | >70 | 1000W HPS / 1000W MH | 50,000 | S-64APZW | Damp |

Additional Information for LED Replacement Lamps for HID: Open and Closed Rated - Ballast bypass required
 These products are covered by U.S. Patents 10788163 and 10508776. These products may also be covered by other U.S. patents or pending applications.

LED HID E26/EX39 Socket Adapter

Current offers this adapter for use with E26 based GE LED HID lamps in mogul base applications.

| Order Code | Description | Carton Qty ² |
|------------|----------------------|-------------------------|
| 93151372 | LED/E26/EX39/ADAPTER | 60 |

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = 1

³ E26 based products are not eligible for DLC. Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

⁴ Do not use with phase-cut dimmers. Dimming functions only with external Variac control devices.

⁵ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

⁶ Not suitable for air-tight explosive or hazardous fixtures.

⁸ Wattage Replacement levels correspond with wattage levels. Wattage Replacements based on NEMA Standards Publication LL 10-2020 *Replacing HID Lamps with LED Lamps: Light Output Equivalency Claims*.