




The bright white radiance of GE's LED PAR20 lamps is not just something you see, it's something you feel.

LED PAR20 lamps

PERFORMANCE DATA

Directional Lamps (PAR)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	CBCP	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	Dimmable	ENERGY STAR® Status	#Location Rating	Additional Information
Compact PAR20																	
	MED	7	93327	LED7DP203B830/20	120	6	3.5	520	3600	3000	80	50W	25,000	Yes	★	Damp	Accent, 20° beam Black
			93347	LED7DP203W830/20	120	6	3.5	520	3600	3000	80	50W	25,000	Yes	★	Damp	Accent, 20° beam White
			93348	LED7DP203W830/35	120	6	3.5	520	1200	3000	80	50W	25,000	Yes	★	Damp	Accent, 35° beam White
			93349	LED7DP203B827/20	120	6	3.5	500	3600	2700	80	50W	25,000	Yes	★	Damp	Accent, 20° beam Black
			93354	LED7DP203B827/35	120	6	3.5	500	1150	2700	80	50W	25,000	Yes	★	Damp	Accent, 35° beam Black
			93360	LED7DP203W827/20	120	6	3.5	500	3600	2700	80	50W	25,000	Yes	★	Damp	Accent, 20° beam White
			93362	LED7DP203W827/35	120	6	3.5	500	1150	2700	80	50W	25,000	Yes	★	Damp	Accent, 35° beam White

For additional product and application information, please consult GE's website: gelighting.com/ThinkLED

ecomaginationSM



imagination at work

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

** Minimum order quantity = 6

★ ENERGY STAR® status: ENERGY STAR® certified. Lamps without a "★" are not ENERGY STAR® certified.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.


Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.


Notes: 1) Product descriptions ending in "/TTP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.

2) LED A19 Locking device works on PC: 85791, 85792, 89898, 62182, 89899 and 89900

CHROMATICITY DIAGRAM

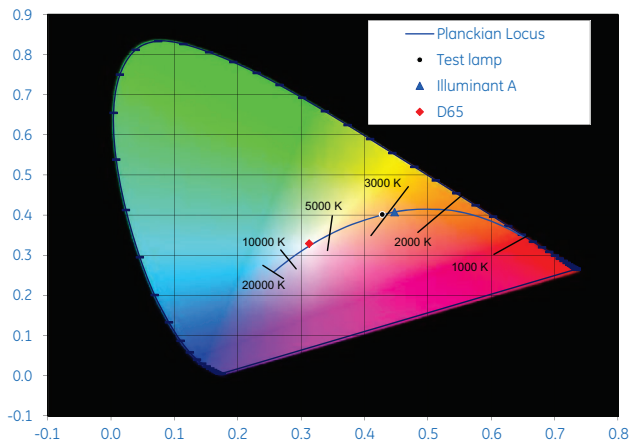


SPECTRAL POWER DISTRIBUTION

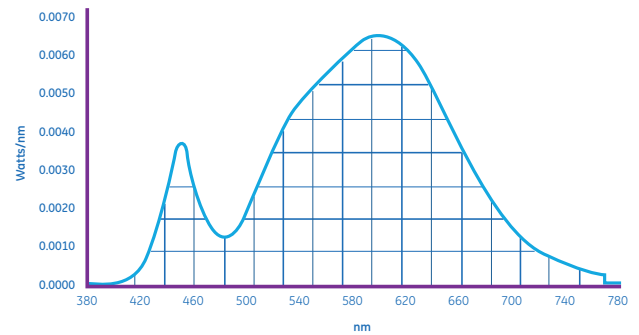


20° BEAM

POLAR PLOT – 20° BEAM

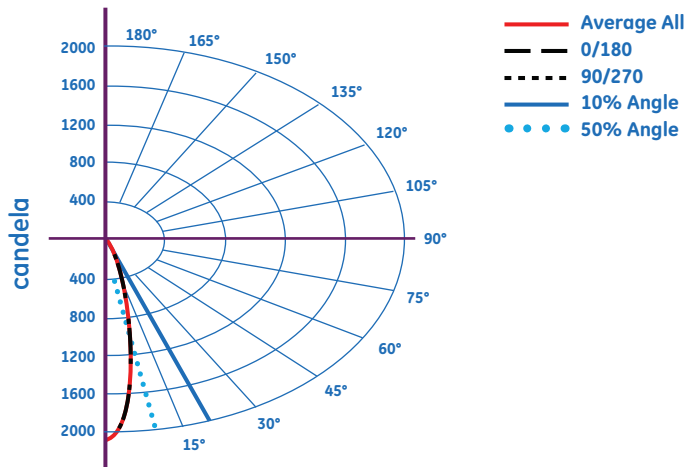

CONE DIAGRAM

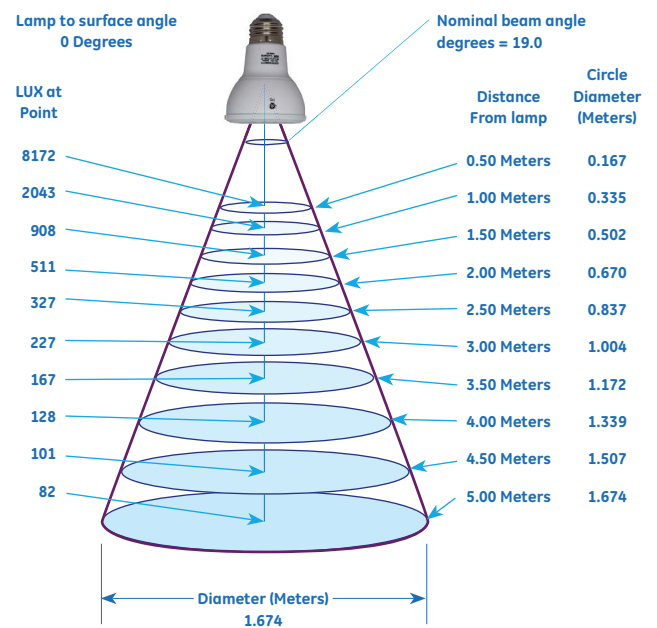

For additional product and application information, visit
www.gelighting.com/ThinkLED

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.



LEARN MORE AT
energystar.gov

Product is compliant with material restriction requirements of RoHS

ENERGY STAR® and the ENERGY STAR® logo are registered U.S. marks



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2016 GE.

69179 (Rev 3/9/16)