



MasterColor CDM ED17 Protected

MasterColor CDM 150W/830 ED17P P CL ALTO+FB

Direct retrofit with immediate energy savings! Range of protected, high-efficiency long life ceramic metal halide lamps with a stable color over lifetime and a crisp, sparkling light to be used in open fixtures.

Product data

• General Characteristics

Base	Medium [Single Contact Medium Screw]
Base Information	Brass [Brass Base]
Bulb	ED17P [Protected]
Bulb Material	Hard Glass
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
Main Application	General Lighting
RatedAvgLife(See Family Notes)	16000 hr

Lamp Voltage	95 V
Lamp Current	1.8 A
Ignition Time	10 (max) s
Re-ignition Time [min]	12 (max) min

• Environmental Characteristics

Mercury (Hg) Content	14.2 (max) mg
Picogram per Lumen Hour	98.3 p/LuHr

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	80 (min), 83 (nom) Ra8
Color Designation	Warm White
Color Temperature	3000 K
Color Temperature technical	2900 K
Initial Lumens	12900 Lm
Luminous Efficacy Lamp	86 Lm/W
Lumen Maintenance - 10% life	85 %
Lumen Maintenance - 40% life	70 %
Design Mean Lumens	9030 Lm
Chromaticity Coordinate X	0.425 (min), 0.434 (nom), 0.443 (max)
Chromaticity Coordinate Y	0.386 (min), 0.392 (nom), 0.398 (max)

• UV-related Characteristics

Damage Factor D/fc	0.19 -
PET (NIOSH)	302.9 h500lx
UV A	5.79 mW/cm ²
UV B	0.0 mW/cm ²
UV C	0.02 mW/cm ²

• Luminaire Design Requirements

Cap-Base Temperature	190 (max) C
Bulb Temperature	400 (max) C

• Product Dimensions

Light Center Length L	3.44 in
Max Overall Length (MOL) - C	5.438 (max) in
Diameter D	2.125 in

• Electrical Characteristics

Watts	150 W
-------	-------

PHILIPS

• Product Data

Product number 134635
 Full product name MasterColor CDM 150W/830 ED17P
 P CL ALTO+FB
 Short product name MHC150/U/MP/3K ALTO 12PK
 Pieces per Sku 1


eop_pck_cfg 12
 Skus/Case 12
 Bar code on pack 46677134631
 Bar code on case 50046677134636
 Logistics code(s) 928601171501
 eop_net_weight_pp 0.001 kg

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will

remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

Dimensional drawing

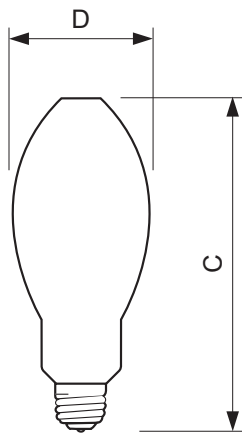

MasterColor CDM 150W/830 ED17P P CL ALTO+FB

Product	C (Max)	D (Norm)
MHC P 150W/830 E26 ED17P U ALTO+FB	5,438	2,125



E26



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change