

Switch Start Metal Halide Protected

Switch Start MH Protected 1000W/635 Excl Mog BT56 CL

An efficient, protected "O" rated lighting solution that is suitable for open-rated fixtures. Ideal for both indoor and outdoor applications.



Product data

• General Characteristics

Base	Exclusionary Mogul Screw [Exclusionary Mogul Screw]
Base Information	Nic/Brass [Nickel/Brass Base]
Bulb	BT56
Bulb Material	Hard Glass
Bulb Finish	Clear
Operating Position	Base Up +/-15D [Hanging +/-15D or Base Up (BU)]
Main Application	General Lighting
RatedAvgLife(See Family Notes)	12000 hr

• Light Technical Characteristics

Color Code	635 [CCT of 3500K]
Color Rendering Index	65 Ra8
Color Designation	White
Color Temperature	3500 K
Color Temperature technical	3500 K
Initial Lumens	107000 Lm
Luminous Efficacy Lamp	107 Lm/W
Design Mean Lumens	69550 Lm
Chromaticity Coordinate X	405 -
Chromaticity Coordinate Y	390 -

• Electrical Characteristics

Watts	1000 W
Lamp Voltage	263 V
Lamp Current	4.1 A
Ignition Time	120 (max) s

Re-ignition Time [min]	15 (max) min
------------------------	--------------

• Environmental Characteristics

Mercury (Hg) Content	145 mg
Picogram per Lumen Hour	173.7 p/LuHr

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.70 - 59.9 h500lx
--------------------------------	--------------------

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Bulb Temperature	430 (max) C

• Product Dimensions

Light Center Length L	9.5 in
Max Overall Length (MOL) - C	15.375 (max) in
Diameter D	7 in

• Product Data

Product number	281188
Full product name	Switch Start MH Protected 1000W/635 Excl Mog BT56 CL
Short product name	MP1000/BU 6PK
Pieces per Sku	1
Skus/Case	6

PHILIPS

Switch Start Metal Halide Protected

Bar code on pack 46677281182
Bar code on case 50046677281187




Logistics code(s) 928601179601
eop_net_weight_pp 0.001 kg

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will

remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

Dimensional drawing

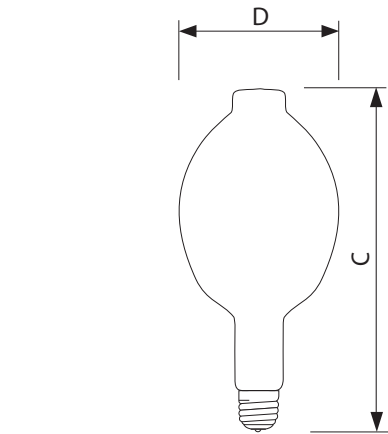

EX39

Switch Start MH Protected 1000W/635 Excl Mog BT56 CL

Product	C (Max)	D (Norm)
MP 1000W/635 EX39 BT56 BU	15.375	7



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, June 6
data subject to change