


Switchpack specifications

Operating Temp:	-30° to 70° C amb.
Enclosure:	Polycarbonate
Connector Type:	RJ-11 plug
Input:	120/277 VAC 1.4/1.0 mA 50/60 HZ
Leads:	600 VAC 105° C 18 AWG 5" min. Black Line White Neutral Blue Switch leg
Output:	Blue switch leg Max 3A @ 120-277 VAC 50/60 HZ Electronic or magnetic RJ-11 port Cable Class 2 power supply UART communication
Dimming Control:	0-10V sink Low 0.7 V High 9.8 V Purple (Dim +) Grey (Dim -)

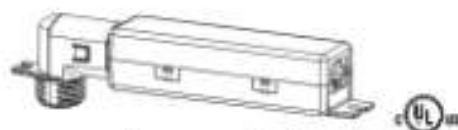

Indoor Switchpack

L	6.55"	166.4 mm
W	1.10"	27.9 mm
H	1.08"	27.4 mm

Mounting

Option 1 (Two screws)

Slot-to-slot	6.26"	159.0 mm
Slot dia.	0.20"	5.1 mm

Option 2 (One screw + locknut)

90° Adapter included
Threads ½" – 14 NPSL

SAP Information

Catalog No. MSP03-ANI-MV



*To be mounted inside fixture enclosure

Outdoor Switchpack

L	4.17"	105.9 mm
W	1.01"	25.7 mm
H	1.02"	25.9 mm

Mounting

Two Screws

Slot-to-slot	3.63"	92.2 mm
Slot dia.	0.20"	5.1 mm

SAP Information

Catalog No. MSP03-ANO-MV