



MSR Hot Restrike

MSR 575 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General information		Operating and electrical	
Base	G22 [G22]	Correlated Color Temperature (Nom)	6000 K
Operating Position	Universal [Universal]	Luminous Efficacy (Rated) (Min)	75 lm/W
Main Application	Studio/Theatre	Luminous Efficacy (rated) (Nom)	83 lm/W
Life to 50% Failures (Nom)	1000 h	Color Rendering Index (Nom)	90
System Description	Hot Restrike		
Light technical		Controls and dimming	
Color Code	- [Not Specified]	Dimmable	Yes
Initial lumen (Min)	43200 lm		
Initial lumen (Nom)	48000 lm		
Chromaticity Coordinate X (Nom)	323		
Chromaticity Coordinate Y (Nom)	328		

MSR Hot Restrike

Mechanical and housing	
Cap-Base Information	na [-]
Luminaire design requirements	
Bulb Temperature (Max)	1292 °F
Pinch Temperature (Max)	662 °F
Pinch Temperature (Max)-DUP(do not use)	662 °F
Product data	
Order product name	MSR 575 HR 1CT/4

EAN/UPC - Product	8718291221050
Order code	287276
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928097705115
Net Weight (Piece)	0.22 lb



Dimensional drawing



MSR 575 HR 1CT/4

Product	D (max)	O (min)	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575	1-3/16	5/16	2-3/4	2-13/16	2-3/4	5-3/4	1-3/4	1-11/16	1-5/8
HR 1CT/4	in	in	in	in	in	in	in	in	in

Photometric data

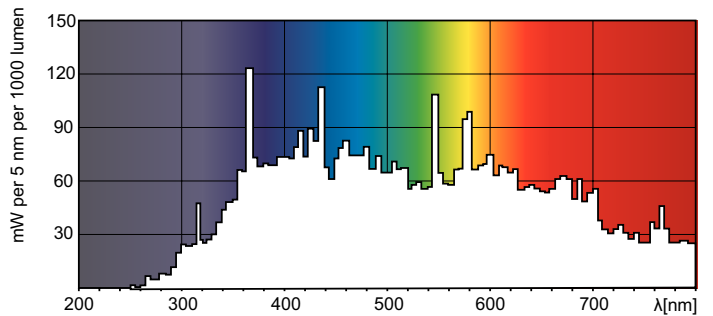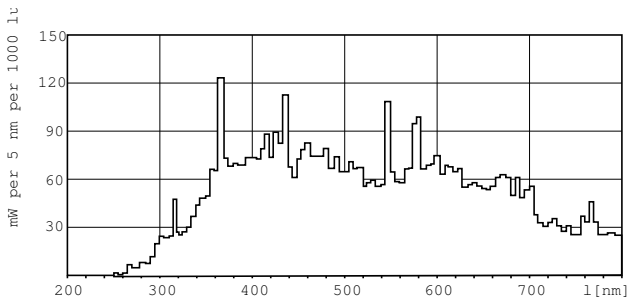

XDPO_XDMSR_HR_--Spectral power distribution Colour

MSR Hot Restrike

