



MSR Gold™ MiniFastFit (Touring/ Stage)

MSR Gold™ 575/2 MiniFastFit 1CT/4

Thanks to the specially designed lamp base, the MSR Gold™ MiniFastFit takes just seconds to replace, to help ensure non-stop clubbing entertainment. In addition, the innovative gold plated pins ensure excellent current transfer to prolong lamp and lamp holder lifetimes and thereby reduce lamp replacement costs. Easy handling and small compact fixture designs are allowed by the lamps compact size, while the very short arc provides a high perceived brightness and high beam intensity.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General information		Light technical	
Base	PGJX28 [PGJX28]	Color Code	2
Operating Position	Universal [Universal]	Initial lumen (Nom)	36800 lm
Main Application	Entertainment	Chromaticity Coordinate X (Nom)	296
Life to 50% Failures (Nom)	750 h	Chromaticity Coordinate Y (Nom)	315
System Description	MiniFastFit	Correlated Color Temperature (Nom)	7500 K
		Luminous Efficacy (rated) (Nom)	64 lm/W

MSR Gold™ MiniFastFit (Touring/Stage)

Color Rendering Index (Nom)	70
Operating and electrical	
Power (Rated) (Nom)	575 W
Lamp Current (Nom)	10.2 A
Ignition Supply Voltage (Min)	198 V
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-Base Information	PGJX28
Luminaire design requirements	
Bulb Temperature (Max)	1742 °F

Pinch Temperature (Max)	752 °F
Pinch Temperature (Max)-DUP(do not use)	752 °F
Pinch Temperature (Min)	572 °F
Pinch Temperature (Min)-DUP(do not use)	572 °F
Product data	
Order product name	MSR Gold™ 575/2 MiniFastFit 1CT/4
EAN/UPC - Product	8718291221098
Order code	287201
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928184005115
Net Weight (Piece)	0.154 lb



Dimensional drawing



MSR Gold™ 575/2 MiniFastFit 1CT/4

Product	D (max)	O	L (min)	L (max)	L (max)	C (max)	F (max)	F (max)	F (min)
MSR Gold™ 575/2 MiniFastFit 1CT/4	15/16 in	3/16 in	2-3/16 in	2-1/4 in	2-1/4 in	4-7/16 in	1-7/16 in	1-7/16 in	1-7/16 in

Photometric data

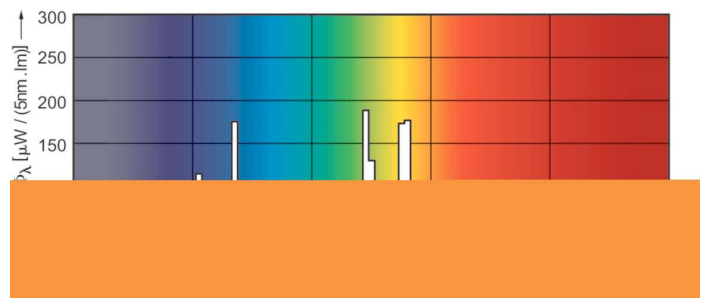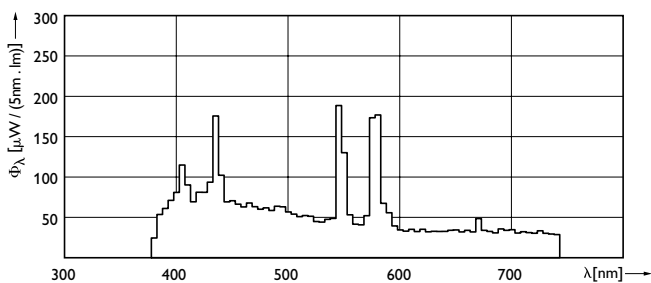

XDPB_XDMSR_0004-Spectral power distribution B/W

MSR Gold™ MiniFastFit (Touring/Stage)

