



cUL[®] US RoHS ISO9001



Input Voltage (V)			277
Max Input Circuit (A)			1.16
Max Output Circuit (A)			2.50
Max. Load(VA)			300
Output Voltage (V)			120
Full Load	EFF. (%)		93
	THD (%)		3.1
	Power Factor		0.995
UL Class H 180 Temp. Code			A
Dimension (inches/mm)	Basic dimensions	A*	2.17±0.04/55±1
		B(Max)	3.39/86
		W	2.64±0.04/67±1
		H	2.20±0.04/56±1
	Installation dimensions	M1	2.27/57.6
		M2	2.90±0.04/73.6±2
		M3	0.96/24.4
		M4	3.11±0.04/79±2
		L	3.35±0.04/85±2
Max Net Weight (lbs)			3.30
Max Net Weight + LW (lbs)			3.39
Lead Length (inches)			8±0.5

A* not covered the thickness of the two holders

*Lead Type: (AVLV2, AVLV8), Type 3135, No. 18 AWG (or Equivalent), rated 200°C, 600 V. Strip 10mm Tin Plated.

Product Standards: UL 5085-1, UL 5085-2
UL CCN: XPTQ2, XPTQ8

Model No.	MTM03002712C
Product Type	Step-down Transformer
Rating (VA)	300
Vin Vout	277VAC 120VAC
Frequency	60 Hz
Status	Production

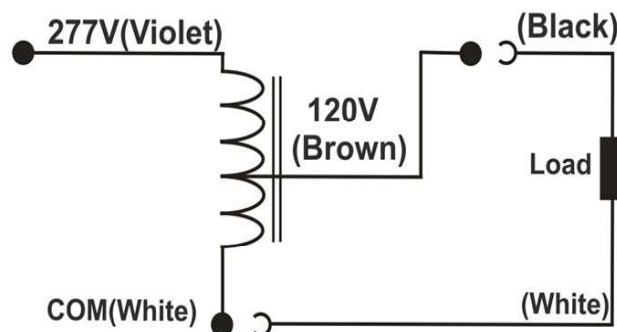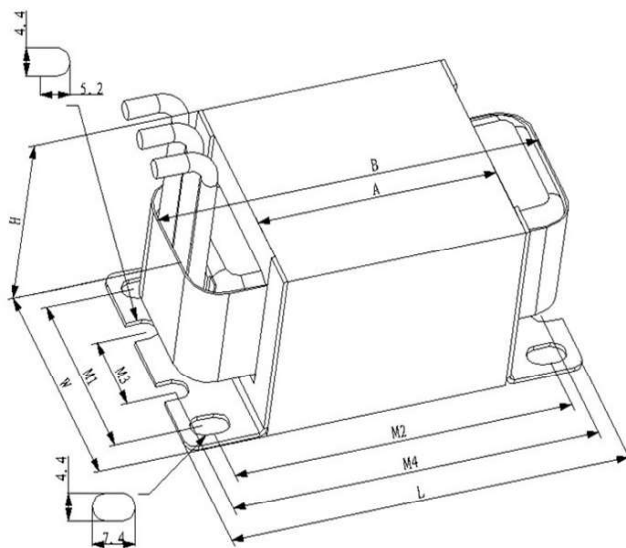

Document No.:	PS_MTM_VA0300_27-12_C_M03
Date:	2017-02-08 (yyyy-mm-dd)