

Presented By: Candela Corporation
Contact Phone: 800-922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

72882 - MVR250/HOR/PA

GE Multi-Vapor® PulseArc® Quartz Metal Halide ED28

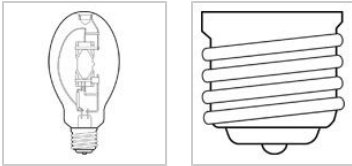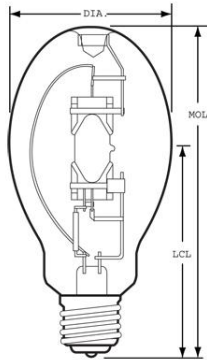

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED28
Base	Mogul Screw (E39)
Rated Life (NOM)	12000.0 h
Lamp Enclosure Type (LET)	Enclosed fixtures only
Base Temperature (MAX)	210.0 °C
Bulb Temperature (MAX)	400.0 °C
Mercury Content (NOM)	40.0 mg
Picograms of Mercury (NOM)	219.0 pg

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	20000.0
Mean Lumens (NOM)	13700.0
Nominal Initial Lumens per Watt (NOM)	80.0
Color Temperature (NOM)	4400.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	250.0
Burn Position	Horizontal ±75°
Warm Up Time to 90% (MIN)	2.0 min
Warm Up Time to 90% (MAX)	5.0 min
Hot Restart Time to 90% (MIN)	10.0 min
Hot Restart Time to 90% (MAX)	15.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	8.250 in(209.5 mm)
Bulb Diameter (DIA) (NOM)	3.500 in(88.9 mm)
Light Center Length (LCL) (NOM)	5.000 in(127.0 mm)

PRODUCT INFORMATION

Product Code	72882
Description	MVR250/HOR/PA
ANSI Code	M138/M153
Standard Package	Case
Standard Package GTIN	10043168728826
Standard Package Quantity	12
Sales Unit	Case
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168728829

NOTES

- When operated on a 120 hrs. cycle (minimum), lamp life rating may be extended by up to 50% based on engineering estimates.