



Electrical Specifications

Input

Input Voltage (VAC)	120V-277V (+/- 10%)	
Frequency Range (Hz)	50 – 60 Hz (+/- 10%)	
	120V	277V
Input Current (A)	0.35	0.15
THD @ Full load	<20%	<20%
Power Factor @ Full load	>0.9	>0.9
Efficiency @ Full load	≥88%	≥88%
Inrush Current (Apk, T@10% of Apk) ²	5.6A, 130μs	14.6A, 110μs

2 - Complies with NEMA 410 inrush current

General Information

Item Number	*2743WR (57441) *2743WT (57443) *2743WU (57444) *2743WV (57445) *2743WW (57446) *2743WX (57447)
Type	Constant Current, Class 2
Output Power	35W (Max.)

Environmental Specifications

Ambient Operating Temperature	-20°C to 50°C
Case Temperature (Tc)	70°C (50kHrs) ¹
Max. Storage Temp.	70°C
Max. Relative Humidity (%)	85% non-condensing
Transient Protection	ANSI C62.41 Cat. A 2.5kV Ring Wave
EFT	IEC 61000-4-4 (1kV)
UL Rating	Dry & Damp
UL File number	E320395
EMI Compliance	FCC Part 15 Class A
Sound Rating	Class A

1 - Warranty applicable only at 70°C

Output

Output Current (mA)	500/640/660/700/720/740 (fixed)
Output Voltage (VDC)	20-50VDC
Output Ripple Current	<30% @ full load
Max. Output Power (W)	35W
LED Power-Up Time	<1sec
Load Regulation	<5% @ 750mA
Line Regulation	<5% @ 750mA
Over Voltage (4V over limit)	Yes, non-latching
Output Short-Circuit Protection	Yes, non-latching

Dimming

Dimming Control	0 – 10V
Dimming Range	10-100%
Dimming Type	Current Reduction
Dimming Input Isolation	2.5kV
Source Current	2mA max


CAUTION: Two power supplies if dimming is connected to non-class 2 circuits.



Ordering Guide

Item Number	Original Item Number	Ordering Description
*2743WR	57441	OT 35W/UNV/0A7 DIM L 500
*2743WT	57443	OT 35W/UNV/0A7 DIM L 640
*2743WU	57444	OT 35W/UNV/0A7 DIM L 660
*2743WV	57445	OT 35W/UNV/0A7 DIM L 700
*2743WW	57446	OT 35W/UNV/0A7 DIM L 720
*2743WX	57447	OT 35W/UNV/0A7 DIM L 740

Wiring Diagram

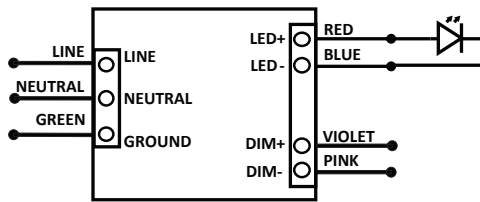


Note:

Maximum suggested remote mounting distance is 8 feet.
 Use solid copper wire only (16-22 AWG).
 For connections use wire rated for at least 90°C (194F).
 Strip wire as below.




Mechanical Diagram

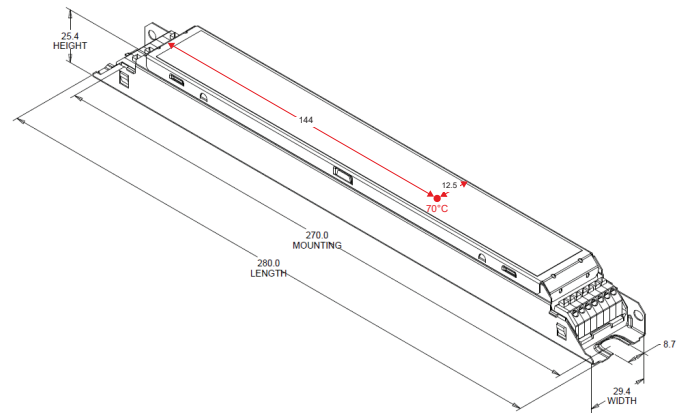

Mechanical Specification


Length	11.02" (280mm)
Width	1.15" (29.4mm)
Height	1.0" (25.4mm)
Mounting Length	10.63" (270mm)
Tc Point from side	0.50" (12.5mm)
Tc Point from end	5.7" (144mm)

Dimming Curve

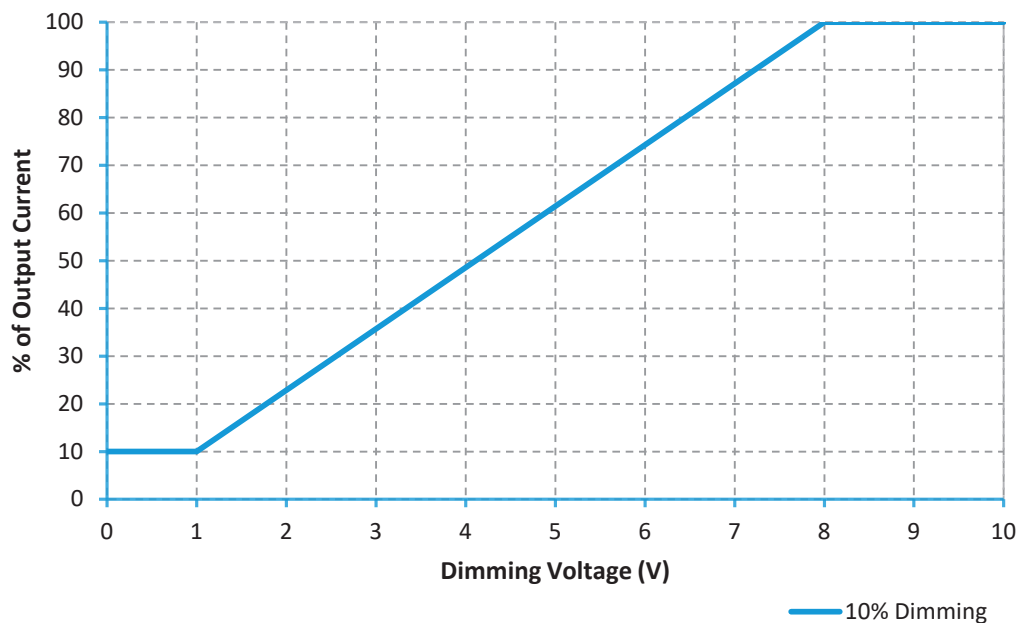


Efficiency vs. Output Voltage


Efficiency @ 120V

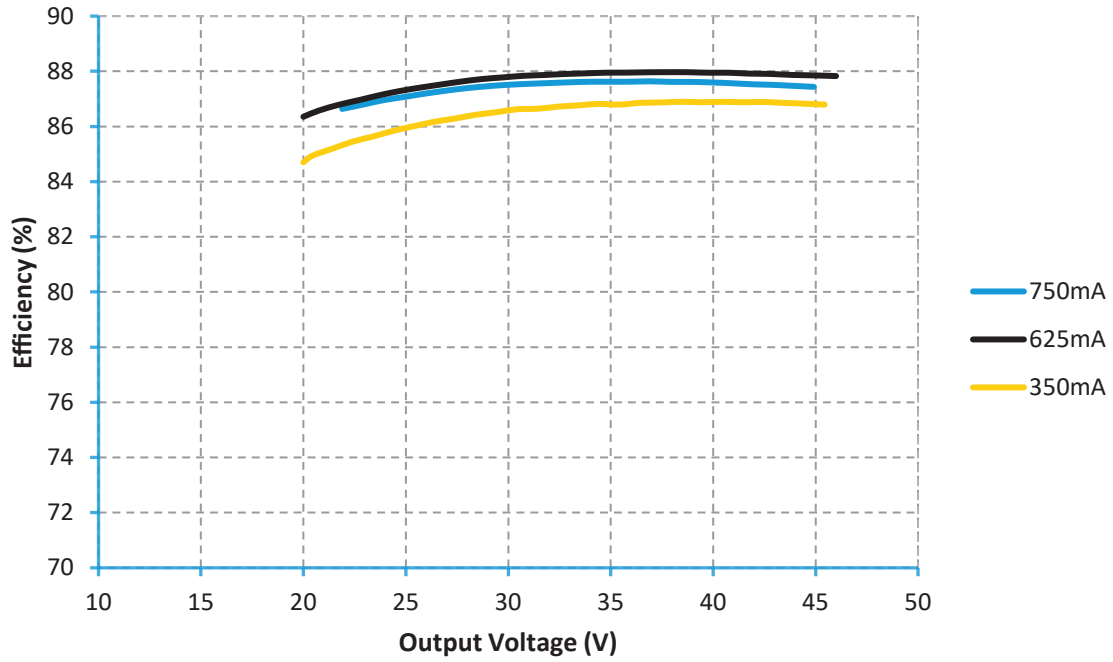


Efficiency @ 277V

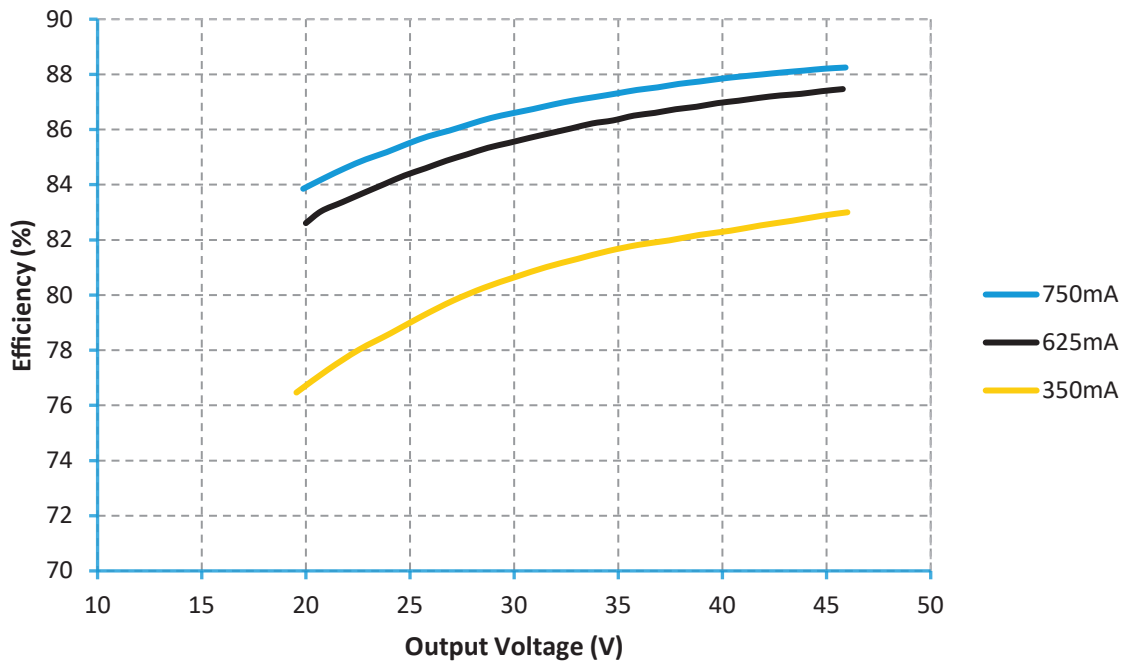

Power Factor vs Load

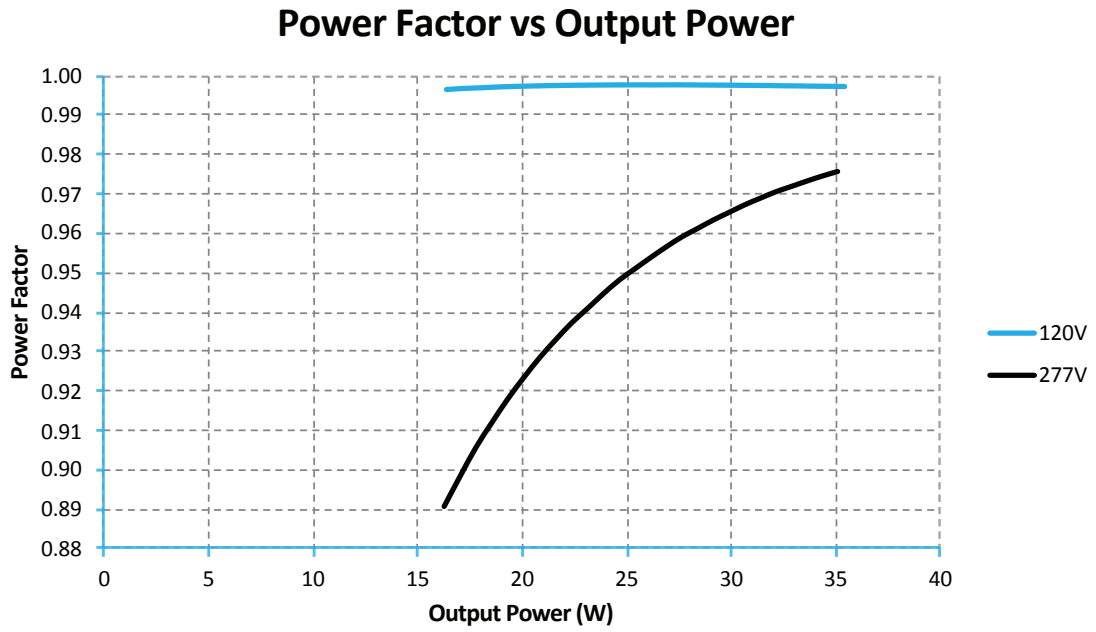

THD vs Load

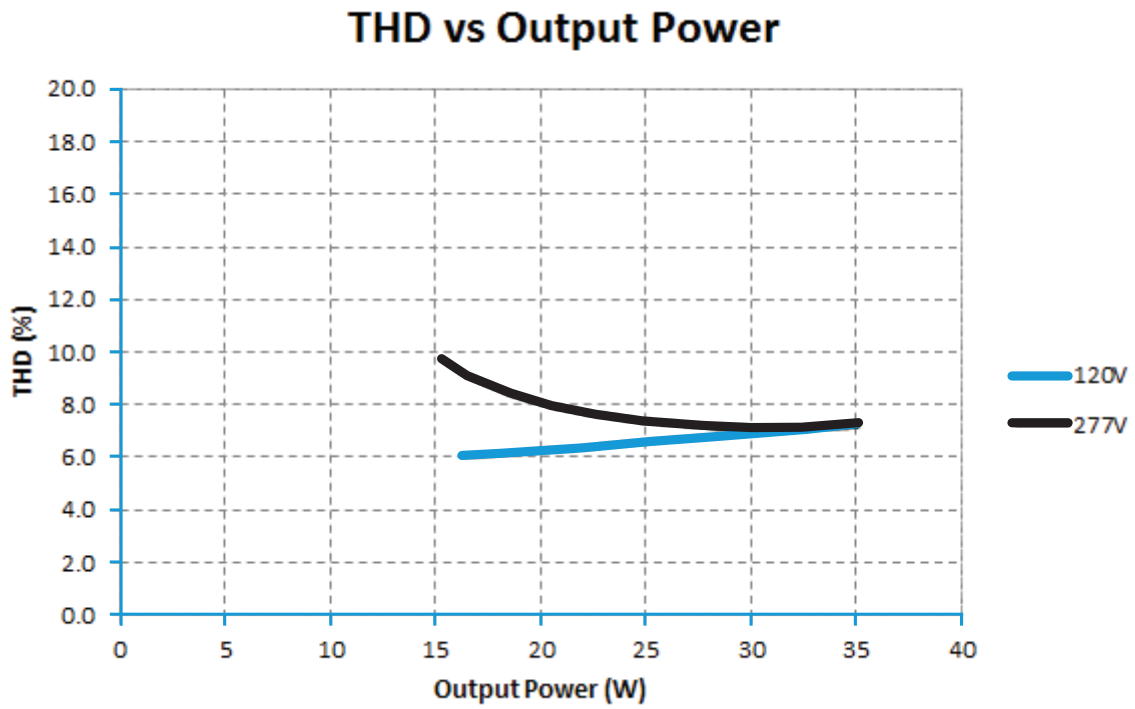

Warranty

OPTOTRONIC® by eldoLED Products are covered by a 5-year limited warranty.
Complete warranty terms can be found at: www.eldoled.com/legal/terms-and-conditions

eldoLED
One Lithonia Way
Conyers, GA 30012
United States

+1 877 353 6533

nasupport@eldoLED.com
www.eldoLED.com

©2023 Acuity Brands Lighting, Inc.
Specifications subject to change without notice. Actual performance may differ as a result of end-user environment and application.

SS3010047-001-00