



PL-T Triple 4-Pin Base

PL-T 26W/827/A/4P 1CT/5X10BOX ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Warnings and Safety

- · Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General information				
Base	GX24Q-3 [GX24q-3]			
LSF Preheat 2000 h Rated	99 %			
LSF Preheat 4000 h Rated	98 %			
LSF Preheat 6000 h Rated	97 %			
LSF Preheat 8000 h Rated	90 %			
Light technical				
Color Code	827 [CCT of 2700K]			
Initial lumen (Nom)	1750 lm			
Luminous Flux (Rated) (Nom)	1750 lm			
Color Designation	Incandescent White			
Correlated Color Temperature (Nom)	2700 K			
Luminous Efficacy (rated) (Nom)	64.8 lm/W			

Color Rendering Index (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	85 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
Operating and electrical	
Power (Rated) (Nom)	27.0 W
Lamp Current (Nom)	0.335 A
Temperature	
Design Temperature (Nom)	82 °F


PL-T Triple 4-Pin Base

Controls and dimming				
Dimmable	Yes			
Mechanical and housing				
Cap-Base Information	4P			
Approval and application				
Mercury (Hg) Content (Nom)	1.4 mg			
Product data				
Order product name	PL-T 26W/827/A/4P 1CT/5X10BOX ALTO			


EAN/UPC - Product	046677384401		
Order code	458240		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	10		
Material Nr. (12NC)	927910982750		
Net Weight (Piece)	0.141 lb		
ILCOS Code	FSM-26/27/1B-E-GX24q=3		



Dimensional drawing

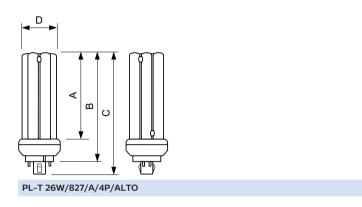



Photometric data

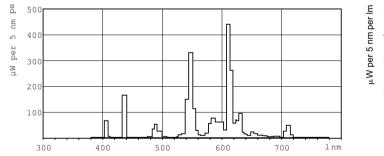

LDPB_PLTTOP4P_827-Spectral power distribution B/W


Product	D (max)	A (max)	B (max)	C (max)
PL-T 26W/827/A/4P/ALTO	1-5/8 in	3-7/16 in	4-3/8 in	5 in






PL-T Triple 4-Pin Base

Lifetime

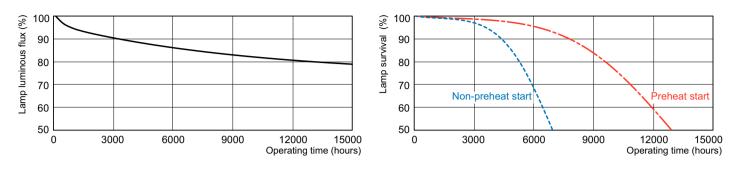

LDLM_PLTTOP4P_0001-Lumen maintenance diagram

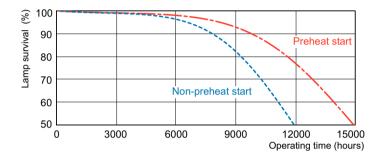

LDLE_PLTTOP4P_0002-Life expectancy diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

LDLE_PLTTOP4P_0001-Life expectancy diagram