
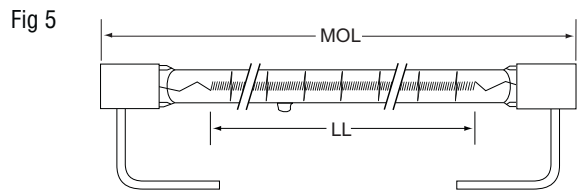
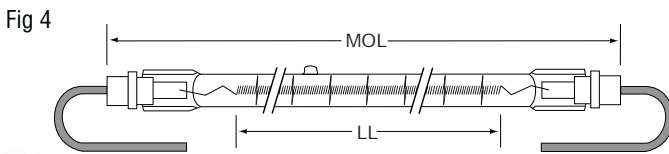
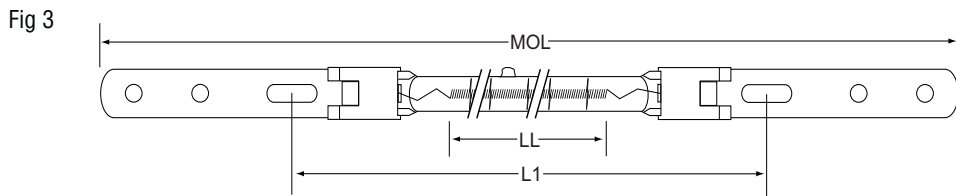
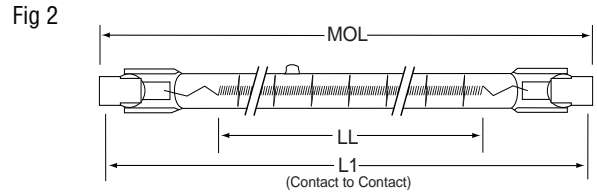


Design Voltage	Ushio Ordering Code	Ushio Lamp Code	Dimensions			Color Temp (K)	Avg Life (h)	Fig No	Alternate Designation	Lamp Notes
			MOL (mm)	LL (mm)	L1 (mm)					
300 Watts										
120	1001288	QIH120-300T/S	214.0	106	—	2450	6000	1	QH300T3	
375 Watts										
120	1001289	QIH120-375T/E	219.0	128	215	2500	6000	2	QH375T3/7	
120	1001290	QIH120-375T/S	223.0	128	—	2500	6000	1	QH375T3	
500 Watts										
105	1001286	QIH105-500T/S	223.0	127	—	2500	6000	1	QH500T3	
120	1001292	QIH120-500/B	356.0	142	241	2500	6000	3	13169X	
120	1001293	QIH120-500/L	223.0	127	—	2500	5000	4	QH500T3/CL	
120	1001294	QIH120-500/S	223.0	127	—	2500	6000	1	QH500T3/CL	
120	1001295	QIH120-500/S2	221.0	142	—	2500	5000	1	13169Y	
120	1001296	QIH120-500/ZB	356.0	142	241	2500	5000	3	13169X/98	
120	1001297	QIH120-500T/E	220.0	127	216	2500	6000	2	QH500T3/7	
120	1001298	QIH120-500T/S	223.0	127	—	2500	6000	1	QH500T3	
120	1003201	QIH120-500T/S3	223.0	127	—	2500	5000	1		R
240	1001352	QIH240-500/D	227.5	165	—	2600	4000	5	13169Z	IW,S
240	1001353	QIH240-500/ZD	227.5	165	—	2600	4000	5	13169Z/98	IW,S
600 Watts										
104	1001285	QIH104-600/S	303.0	152	—	2500	6000	1	600T3/CL/12	
800 Watts										
120	1001299	QIH120-800T/S	303.0	203	—	2500	6000	1	QH800T3	
900 Watts										
216	1001310	QIH216-900/S	405.0	229	—	2500	6000	1	900T3/CL/16	

Please contact National Customer Service Center for detailed specifications and special design requirements.

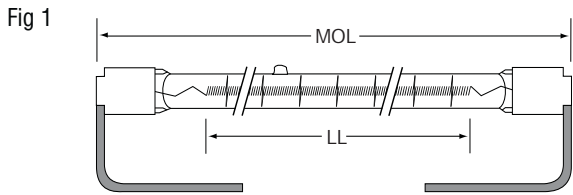

Dimensions
 MOL = Maximum Overall Length
 LL = Lighted Length (filament length) (avg.)
 L1 = Designated Length (avg.)
 Maximum bulb diameter: 11mm
 All dimensions are in millimeters (mm)

Lamp Notes
 F = Faston Terminal (FR = Faston Receptacle, FT = Faston Tab)
 IW = Insulated Wire
 R = Ring Tongue Terminal
 S = Spade Tongue Terminal
 Standard Lead Wire Length: 145mm

