

QUARTZ INFRARED HEATER LAMPS • 2000W

Design Voltage	Ushio Ordering Code	Ushio Lamp Code	Dimensions			Color Temp (K)	Avg Life (h)	Fig No	Alternate Designation	Lamp Notes
			MOL (mm)	LL (mm)	L1 (mm)					
2000 Watts										
240	1001336	QIH240-2000/B	485.0	280	370	2500	5000	3	13213X	
240	1001337	QIH240-2000/C	350.0	280	—	2500	5000	6	13213Y/00	IW,R
240	1001996	QIH240-2000/E	357.0	271	351	2550	3000	2	—	
240	1001338	QIH240-2000/L	350.0	254	—	2500	5000	4	—	
240	1001339	QIH240-2000/S	303.0	248	—	2500	5000	1	QH2M/T3/1CL/HT	
240	1001340	QIH240-2000/S2	351.0	254	—	2500	5000	1	QH2M/T3/CL/HT	
240	1001341	QIH240-2000/VB	485.0	280	370	2500	5000	3	13168X	
240	1001342	QIH240-2000/VC	350.0	280	—	2500	5000	6	13168V	IW,R
240	1001314	QIH240-2000/VD	357.0	280	—	2500	5000	5	13168Z	IW,S
240	1001343	QIH240-2000/VS	303.0	248	—	2500	5000	1	QH2M/T3/1CL/HT/VB	
240	1001344	QIH240-2000/VZD	357.0	280	—	2500	5000	5	13168Z/98	IW,S
240	1001346	QIH240-2000/VZD2	357.0	280	—	2500	5000	5	—	IW
240	1001348	QIH240-2000/ZD2	357.0	280	—	2500	5000	5	—	IW
240	1001349	QIH240-2000JJ1	350.0	270	—	2500	5000	6	—	IW,R
240	1002144	QIH240-2000SEC1*	354.0	290	—	2400	5000	5	(glueless base)	IW
240	1002145	QIH240-2000SEC2*	354.0	290	—	2400	5000	5	(fixed base)	IW
240	1001350	QIH240-2000T/S	603.0	508	—	2500	5000	1	2000T3/524	
277	1001358	QIH277-2000/S	351.0	248	—	2500	5000	1	QH2M/T3/CL/HT	
400	1001361	QIH400-2000/B	623.0	410	508	2500	5000	3	13245X	
400	1001345	QIH400-2000/VB	623.0	410	508	2500	5000	3	13765X	
400	1001362	QIH400-2000/ZB	623.0	410	508	2500	5000	3	13245X/98	

* for plastic blow molding

Fig 1

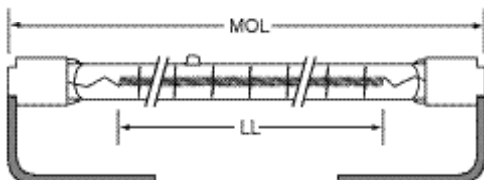


Fig 2

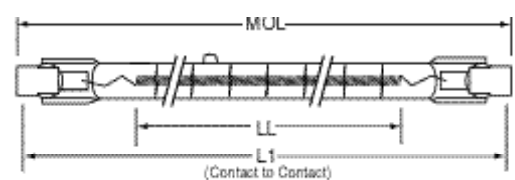


Fig 3

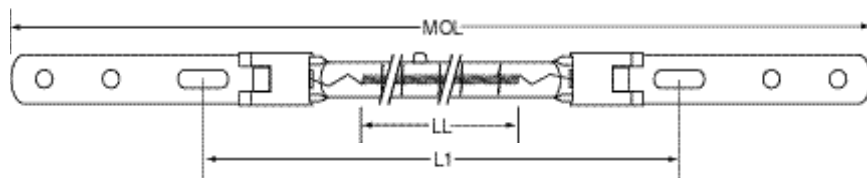


Fig 4



Fig 5

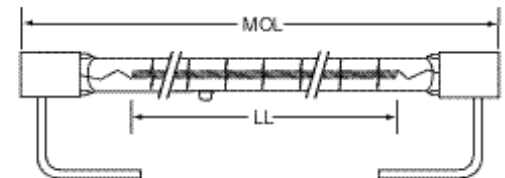


Fig 6



Lamp Notes

- IW = Insulated Wire
- R = Ring Tongue Terminal
- S = Spade Tongue Terminal (lead wire length: 200mm)
- Standard Lead Wire Length: 145mm