



PSU228T5120

Ballast Type:	Electronic
Input Voltage:	120 VAC $\pm$ 10%
Input Frequency:	60Hz.

Starting Method:	Programmed Start
Lamp Connection:	Parallel
Unit Color:	White
Unit Weight:	0.73 lbs.

SKU & Packaging	Quantity
1P20210 (Non-Wrapped)	20
2P20210 (Shrink-Wrapped)	10
3P20210 (Shrink-Wrapped)	1

ELECTRICAL SPECIFICATIONS:

[illegible]

PERFORMANCE:

- Electronic ballast
- Program start
- Parallel operation
- Normal power factor
- Encased & potted
- Sound Rated A
- Meets FCC Part 18 (Class B) for EMI
- Meets DoE Consumer Limits
- Meets ANSI standard C62.41


APPLICATION:

- Maximum case temperature: 167°F/75°C
- Maximum ambient temperature: 131°F/55°C
- Minimum starting temperature:
- Remote mounting: 18 ft. max. lead length, 18AWG


SAFETY/STANDARDS:

- UL/cUL (Class P, Type HL, Type 1 Outdoor)
- Inherent Thermal Protection
- No PCB's
- RoHS Compliant
- QCV: 300V


CASE STYLE: 3B

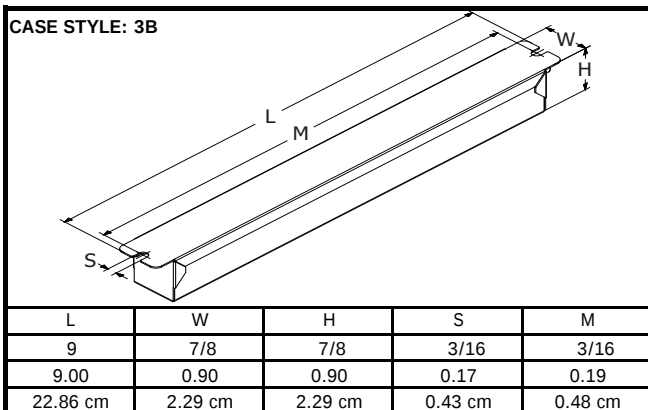

WIRING DIAGRAM: 059

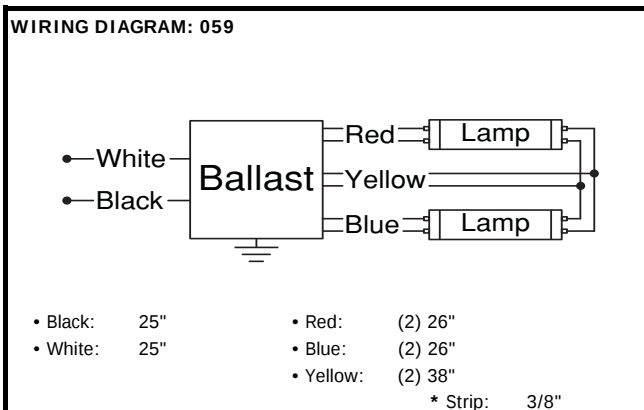

HOT SPOT LOCATION: (Top Label Side of Ballast)

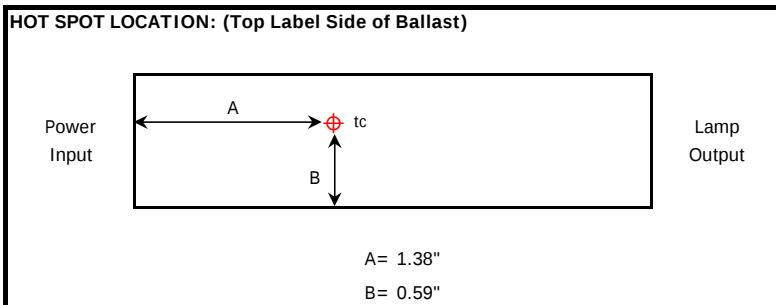

WARRANTY:

Robertson Worldwide warrants to the purchaser that this LED driver will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal condition of use. For more information on Robertson Worldwide ballasts, call 1-800-323-5633 or Visit www.robertsonww.com. specifications subject to change without notice.