

SPECIALTY (GERMICIDAL)


MAGNETIC

[PREHEAT SELF START]


[ENCASED & POTTED]

INPUT										
Lamp Watts	Lamp Config.	Lamp Type	No. of Lamps	Model Number	Input Voltage	Hz	Line Current (Amps)	Nominal Input Current	Max Input Current	Total Input Watts
29	T5 Preheat	GPH610T5	1	HPSS610	120V	60	.33	.33	.40	38
	T5 Preheat	GPH610T5	1	SS16550	120V	60	.90	.90	.95	42
	T5 Preheat	GPH610T5	1	SS16550P	120V	60	.90	.90	1.0	38
	T5 Preheat	GPH609T5	1	SSGPHC800	120V	60	2.0	1.9	2.4	65
30	T5 Preheat	GPH610T5	1	SS1655025C	220V	50	.45	.42	.50	43
	T5 Preheat	GPH638T5	1	SS1655025CP	220V	50	.43	.42	.50	42
33	T5 Preheat	GPH620T5	1	SS1655025CP	220V	50	.45	.45	.50	41
	T5 Preheat	GPH356T5H0	1	SS20604	120V	60	.90	.80	1.0	44
34	T5 Preheat	GPH330T5H0	1	SS20604	120V	60	.70	.70	1.0	44
	T5 Preheat	GPH356T5H0	1	SS2060425	220V	50	.75	.75	1.0	44
	T5 Preheat	GPH356T5H0	1	SS2060435	230V	50	.75	.75	1.0	44
	T5 Preheat	GPH356T5H0	1	SS2060436	230V	60	.75	.75	1.0	44
	T5 Preheat	GPH357T5H0	1	SS20604P	120V	60	.70	.70	1.0	45
34/35	T5 Preheat	GPH357T5H0	1	SS20604	120V	60	.80	.80	1.0	45
	T5 Preheat	GX010T5PH	1	SS20604	120V	60	.80	.70	.75	33
	T5 Preheat	GX010T5PH	1	SS2060445	240V	50	.85	.80	1.0	45
	T5 Preheat	GX010T5PH	1	SS2060446	240V	60	.80	.80	1.0	44
35	T5 Preheat	GPH762T5	1	SS1655046	240V	60	.80	.57	.62	43
	T5 Preheat	GPH793T5	1	SS165508	120V	60	.94	.94	1.0	45
	T5 Preheat	GPH793T5	1	SS16550P	120V	60	.95	.95	1.0	45
	T5 Preheat	GPH798T5	1	SS16550P	120V	60	.95	.95	1.0	45
	T5 Preheat	GPH793T5	1	SS1655025	220V	50	.42	.42	.50	43
	T5 Preheat	GPH793T5	1	SS1655025A	220V	50	.56	.56	.61	45
	T5 Preheat	GPH793T5	1	SS1655025C	220V	50	.45	.45	.50	43
	T5 Preheat	GPH793T5	1	SS1655025CP	220V	50	.45	.45	.50	43
37	T5 Preheat	GPH793T5	1	SS1655026	220V	60	.43	.57	.62	43
	T5 Preheat	GPH810T5	1	SS165508	120V	60	.94	.94	1.0	45
	T5 Preheat	GPH810T5	1	SS1655025CP	220V	50	.40	.40	.50	42
	T5 Preheat	GPH810T5	1	SS1655045C	240V	50	.42	.56	.61	42
38	T5 Preheat	GPH810T5	1	SS1655046CP	240V	60	.60	.57	.62	43
	T6 Preheat	G36T6-4P	1	SS165508	120V	60	.95	.95	1.0	45
	T6 Preheat	GPHU7636T6	1	SS165508P	120V	60	.95	.95	1.0	45
	T6 Preheat	G36T6-4P	1	SS1655025C	220V	50	.42	.42	.50	43
39	T6 Preheat	GPH436T5H0	1	SS1655025CP	220V	50	.61	.55	.60	35
	T6 Preheat	GPH436T5H0	1	SS1655025CP	220V	50	.61	.55	.60	35
40/42	T6 Preheat	GX018T5PH	1	SS2060436	230V	60	.80	.80	1.0	44
	T6 Preheat	GX018T5VHPH	1	SS2060445	240V	50	.80	.80	1.0	44
67	T6 Preheat	GX036T5PH	1	SSGPHA800	120V	60	2.0	2.0	2.5	67
	T6 Preheat	GX036T6VHPH	1	SS2060445	240V	50	.80	.80	1.0	44
	T6 Preheat	GX036T6VHPH	1	SS1655046	240V	60	.80	.57	.62	43


Case Style 8

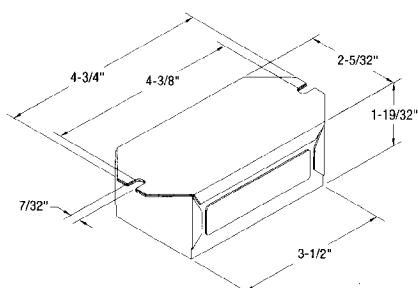

Case Style 10

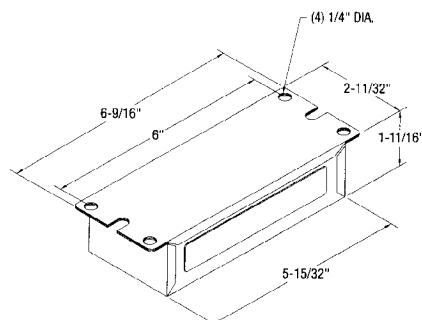


Case Style 11

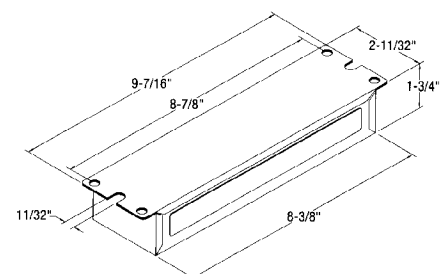


E L E C T R I C A L				M E C H A N I C A L				
Model Number	Min. Start Temp.	Case Style	Case Color	Case Version	Wiring Diagram	Unit Weight	Units Per Carton	Approvals
HPSS610	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS16550	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS16550P	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	UL ENEC
SSGPHC800	10°C (50°F)	14	BLACK	V2	006	6.2 lbs.	6	\
SS1655025C	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025CP	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025CP	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS20604	10°C (50°F)	8	BLACK	V2	006	1.6 lbs.	24	UL
SS20604	10°C (50°F)	14	BLACK	V2	006	6.2 lbs.	6	UL
SS2060425	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS2060435	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS2060436	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS20604P	10°C (50°F)	8	BLACK	V2	006	1.6 lbs.	24	\
SS20604	10°C (50°F)	8	BLACK	V2	006	1.6 lbs.	24	\
SS20604	10°C (50°F)	8	BLACK	V2	006	1.6 lbs.	24	\
SS2060445	10°C (50°F)	11	BLACK	V2	006	3.8 lbs.	10	\
SS2060446	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655046	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS165508	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS16550P	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	UL ENEC
SS16550P	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	UL ENEC
SS1655025	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025A	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025C	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025CP	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655026	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS165508	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	UL ENEC
SS1655025CP	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655045C	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655046CP	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS165508	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS165508P	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025C	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS1655025CP	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS2060436	10°C (50°F)	10	BLACK	V2	006	3.0 lbs.	20	\
SS2060445	10°C (50°F)	11	BLACK	V2	006	3.8 lbs.	10	\
SSGPHA800	10°C (50°F)	14	BLACK	V2	006	6.2 lbs.	6	\
SS2060445	10°C (50°F)	14	BLACK	V2	006	6.2 lbs.	6	\
SS1655046	10°C (50°F)	14	BLACK	V2	006	6.2 lbs.	20	\

Case Style 14

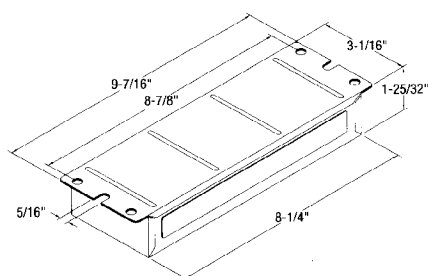

Case Version 2



Wiring Diag. 006

