


RADIONIC INDUSTRIES, INC.

Customer Part #:	Custom Lighting
Vendor:	RADIONIC
R.I. Catalog #:	CE108-27TP
Start method:	PREHEAT
Connection type:	LEADS
Input voltage:	277VAC
Frequency:	60Hz

Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w) (Initial)	B.E.F.	Input Current (RATED)	Power Factor	LCCF	% THD
F4T5	1	4	50	95	9.5	10.0	0.20A	<0.60	<1.65	>15%
PL-5	1	5	32	95	10.3	9.2	0.20A	<0.60	<1.65	>15%
F6T5	1	6	50	94	10.8	8.7	0.20A	<0.60	<1.65	>15%
PL-7	1	7	32	95	11.3	8.4	0.20A	<0.60	<1.65	>15%
F8T5	1	8	50	90	12.0	7.9	0.20A	<0.60	<1.65	>15%
PL-9	1	9	32	89	12.4	7.2	0.20A	<0.60	<1.65	>15%

Wiring Diagram

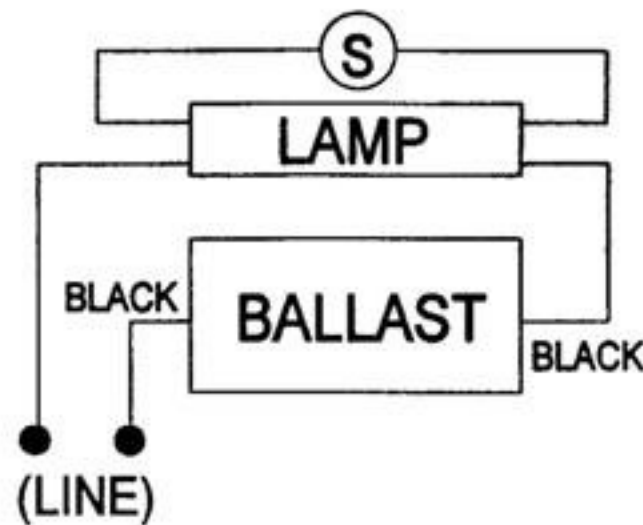


Lead Length (inches)
Tolerance +/- 1"

Black X 2	11 and 12"
White	
Blue	
Red	
Yellow	
Gray	
Violet	

Yellow/Blue	
Blue/White	
Brown	
Orange	
Orange/Black	
Black/White	

Enclosure Drawing

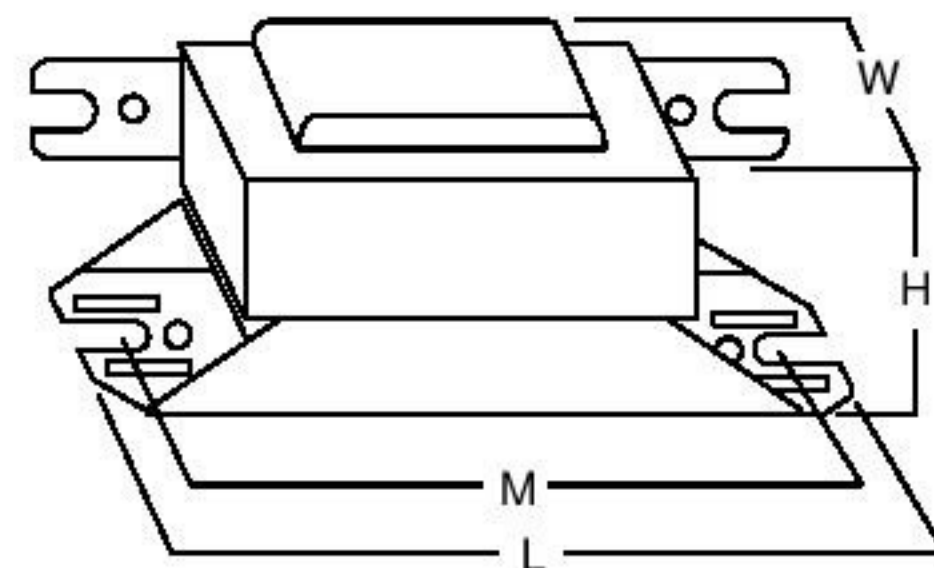

Enclosure Dimension (inches)

Length (L):	Width (W):	Height (H):	Mounting (M):
3-1/16	1-3/4	1-1/4	2-3/4

Safety	cULus	CSA (NRTL/C)	CE	CUL	Other (TUV)
	Approved				

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. msw\rc\balspec-04-21-03