


# RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	ES140HTP
Start method:	RAPID
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

## Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w)	B.E.F.	Input Current (RATED)	Power Factor	LCCF	% THD
F40T12	1	40	50	>0.91	50	1.82	0.43A	>0.95	<1.71	<15
F40T12-34	1	34	60	>0.88	42	2.09	0.43A	>0.95	<1.87	<15
F30T12	1	30	50	>0.80	43	1.86	0.43A	>0.95	<1.35	<15


### Wiring Diagram

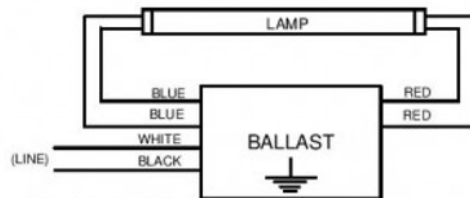

Lead Length (inches)  
Tolerance +/- 1"

Black	22-1/2	Yellow/Blue	
White	22-1/2	Blue/White	
Blue X 2	35-1/2	Brown	
Red X 2	26-1/2	Orange	
Yellow		Orange/Black	
Gray		Black/White	
Violet			

### Enclosure Drawing

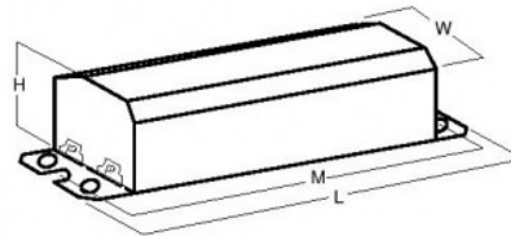

### Enclosure Dimension (inches)

Length (L):	Width (W):	Height (H):	Mounting (M):
9-7/16"	2-5/16"	1-9/16"	8-7/8"

Safety	UL	CSA	CE	CUL	Other
				73XJ	

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. MSW/RC/balspec - 01/03/01