
RADIONIC INDUSTRIES, INC.


Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	PI068
Start method:	PREHEAT
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

Production Specifications: Lamp LPS Rated Min. Start B.F. Input Class # Lamp (W) Temp (F) % ANS

Lamp	LPS	Rated	Min. Start	B.F.	Input (w)	B.E.F.	Input Current	Power	LCCF	% THD
Class	#	Lamp (W)	Temp (F)	%	ANSI		(RATED)	Factor		
F4T5	1	4	50	95	7	13.5	0.16A	>0.50	<1.52	<15
F6T5	1	6	50	90	9	10.0	0.16A	>0.50	<1.53	<15
F8T5	1	8	50	85	11	7.7	0.16A	>0.50	<1.51	<20



Black X 2	7 & 15	
White		Yellow/Blue
Blue		Blue/White
Red		Brown
Yellow		Orange
Gray		Orange/Black
Violet		Black/White

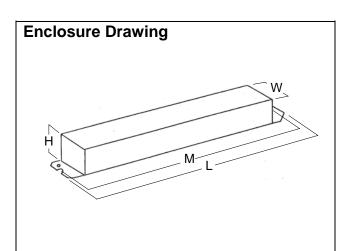

Enclosure Dimension (inches)

Length	Width	Height	Mounting
(L):	(W):	(H):	(M):
5-1/4	1	3/4	5

Safety	UL	CSA	CE	CUL	Other
		LISTED		619L	