



## T4-1/2 AUTOMOTIVE BASE SINGLE & DOUBLE CONTACT CLUSTER LEDS

ORDERING INFORMATION:  $\frac{DCB144}{(A)}$   $\frac{5}{(B)}$   $\frac{WC}{(C)}$   $\frac{1}{(D)}$  -  $\frac{24V/25}{(E)}$  -  $\frac{DP}{(F)}$

### (A) MODEL

SCB/DCB144  
SCB/DCB188

### (B) NUMBER OF LEDS


5 = 5, T1-3/4 CLUSTER LED  
7 = 7, T1-3/4 CLUSTER LED

### (C) LED LENS COLOR


WATER CLEAR

### (D) LED EMITTING COLOR & WAVELENGTH


- 1 = ULTRA RED (660nm)
- 2 = STD. RED (630-635nm)
- U2 = ULTRA HI EFF. RED (623-630nm)
- 3 = STD. ORANGE (605-610nm)
- U3 = ULTRA ORANGE (612-620nm)
- 4 = STD. YELLOW (585nm)
- U4 = ULTRA YELLOW (590-595nm)
- 5 = STD. GREEN (565-570nm)
- \*6NW = ULTRA PURE GREEN (520-530nm)
- \*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- \*10NW = ULTRA BLUE (465-475nm)
- \*11NW = BLUISH GREEN (498-508nm)
- \*12NW = SOFT WHITE (NO nm VALUE)
- \*MAX. CONTINUOUS CURRENT 10mA.



MODEL: SCB / DCB144

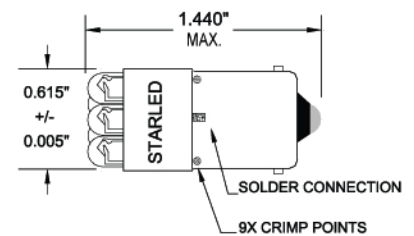

MODEL: SCB / DCB188

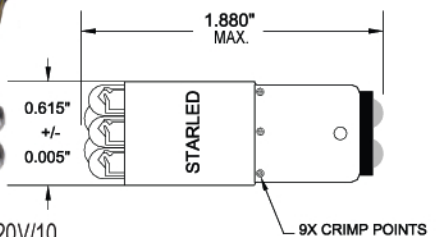

### (E) STANDARD DC & AC OPERATING VOLTAGES/mA

5 CLUSTER LED: 18V/25, 24V/25, 28V/25, 36V/25, 48V/12, 60V/15 & 120V/10  
7 CLUSTER LED: 6V/75, 12V/50, 14V/50, 18V/25, 24V/25, 28V/25, 36V/25, 48V/12, 60V/15 & 120V/10

**NOTE:** PLEASE CALL FACTORY FOR OTHER VOLTAGES

### (F) CENTER CONTACT POLARITY

DP= DUAL POLARITY

### DIRECT INCANDESCENT LAMP REPLACEMENTS

SCB/DCB: 63, 67, 71 & 72, ETC...


SCB/DCB: 6S6DC, 1056/10DC, 209, 210 & 105, ETC...

HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

### BOTTOM VIEW

SCB BASE  
SINGLE CONTACT



DCB BASE  
DOUBLE CONTACT

