


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

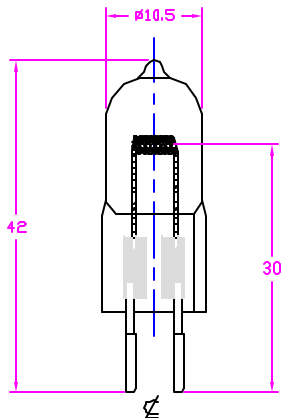

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			CONTRACT NO.		
DECIMALS .X ± -			APPROVALS		
.XX ± -			DATE		
.XXX ± -			DRAWN R.AMPARO 11/18/99		
ANGLES ± -			ENGRS D.GILCZYNSKI 11/18/99		
DRILLED HOLES PER AND 10387			ENGR		
REMOVE BURRS AND SHARP EDGES			DVT		
ALL DIMENSIONS AFTER PLATING			QUAL		
MATERIAL			FINISH		
COMPOSITE			DRAWN ACTVY		
			DVT ACTVY		
			SCALE NONE		
			WEIGHT		
			SHEET 1 OF 1		

USHIO AMERICA, INC.		
5440 Carrlton Ave. Cypress, CA 90630		
TITLE		
SM-18566 HALOGEN LAMP		
SIZE	CODE IDENT NOS	DWG NO.
B		8000123

CHARACTERISTICS	
VOLTAGE	22.8 V
WATTAGE	30 W
LUMEN OUTPUT	950 Lm
BASE TYPE	G8.35
AVERAGE LIFE	700 HRS
FILAMENT TYPE	CD-8
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

4

3

1

4

3

2

1

CAD