


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

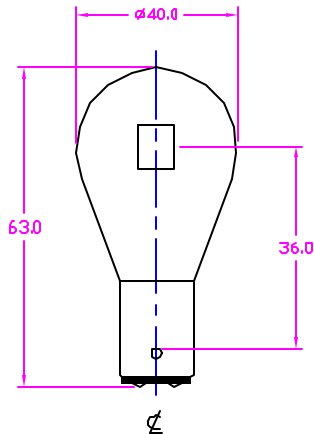

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
AMPERAGE	50 W
FILAMENT TYPE	C-6Z
BULB FINISH	CLEAR
BASE TYPE	BA20d
AVERAGE LIFE	100 HRS
LUMENS	1400 Lm

NEXT ASSY	USED ON
	APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
<b>LIST OF MATERIALS</b>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 10550 Comdan Dr. Cypress, CA 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS DATE			
ANGLES		DRAWN R.AMPARO		03/03/00	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CHECKS D.GILCZYNSKI		03/03/00	
MATERIAL		ENGR		TITLE	
COMPOSITE		MATERIAL		SM-3800-18-2520 SCIENTIFIC MEDICAL LAMP	
		QUAL			
FINISH		DRGN ACTVY		SIZE	
		DRVT ACTVY		CODE IDENT NOS	
		SCALE		80000173	
		WEIGHT		SHEET	
		NONE		1 OF 1	

4

3

1

4

3

2

1

CAD