


| REVISIONS | | | |
|-----------|-------------|------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| | | | |

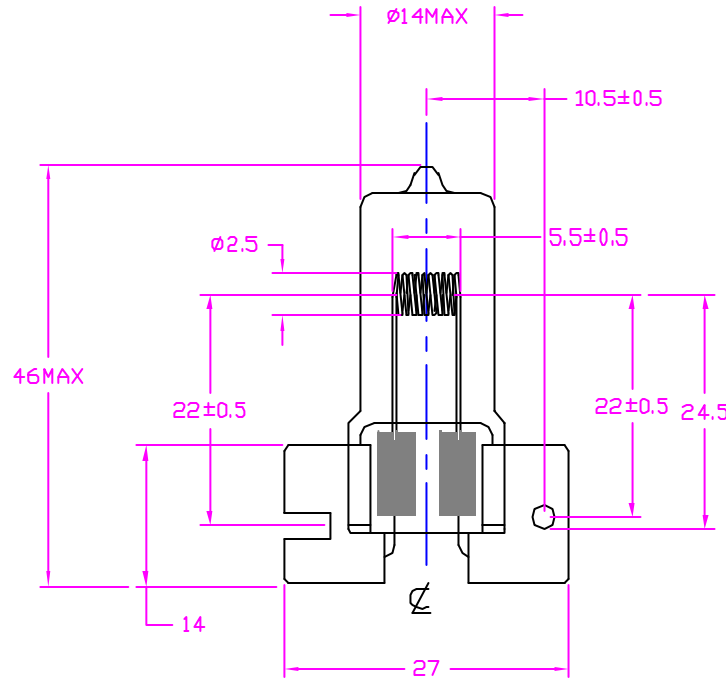

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

| ITEM | QTY | DESCRIPTION | CODE IDENT | PART NUMBER | REMARKS |
|--|-----|----------------------------|------------|--|---------|
| LIST OF MATERIALS | | | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING | | CONTRACT NO. | | USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630 | |
| MATERIAL COMPOSITE | | APPROVALS | | | |
| FINISH | | DATE | | TITLE SM-74000 SCIENTIFIC MEDICAL LAMP | |
| | | DRAWN R.AMPARO 12/22/00 | | | |
| | | CHKD D.GILCZYNSKI 12/22/00 | | SIZE B CODE IDENT NO. DWG NO. 8000230 | |
| | | ENGR | | | |
| | | MFG | | SCALE NONE WEIGHT SHEET 1 OF 1 | |
| | | QUAL | | | |
| | | DSGN ACTVY | | CAD | |
| | | GOVT ACTVY | | | |

| CHARACTERISTICS | | | |
|-----------------|-------------|-------------|---------|
| VOLTAGE | 24 V | | |
| WATTAGE | 120±6 W | | |
| TOTAL LUMEN | 3000±450 Lm | | |
| COLOR TEMP | 3250 K | NEXT ASSY | USED ON |
| AVERAGE LIFE | 200 HRS | APPLICATION | |