


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

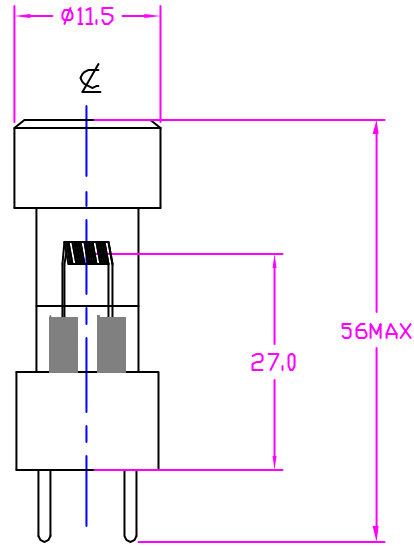

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	50 W
TOTAL LUMEN	1000 Lm
COLOR TEMP.	3000 K
AVERAGE LIFE	100 HRS
FILAMENT TYPE	C-BAR-6
BASE TYPE	G8
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630	
DECIMALS .X ± - .XX ± - .XXX ± -		APPROVALS			
ANGLES ± -		DATE		SM-B101028 SCIENTIFIC MEDICAL LAMP	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN R.AMPARO 06/07/01			
MATERIAL COMPOSITE		CHKD J.COOPER 06/07/01		8000316	
FINISH		ENGR			
NEXT ASSY		MFG		SIZE B	
USED ON		QUAL		CODE IDENT NO.	
APPLICATION		DSGN ACTVY		DWG NO.	
		GOVT ACTVY		SCALE NONE	
				WEIGHT	
				SHEET 1 OF 1	

4

3

1

4

3

2

1

CAD