


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

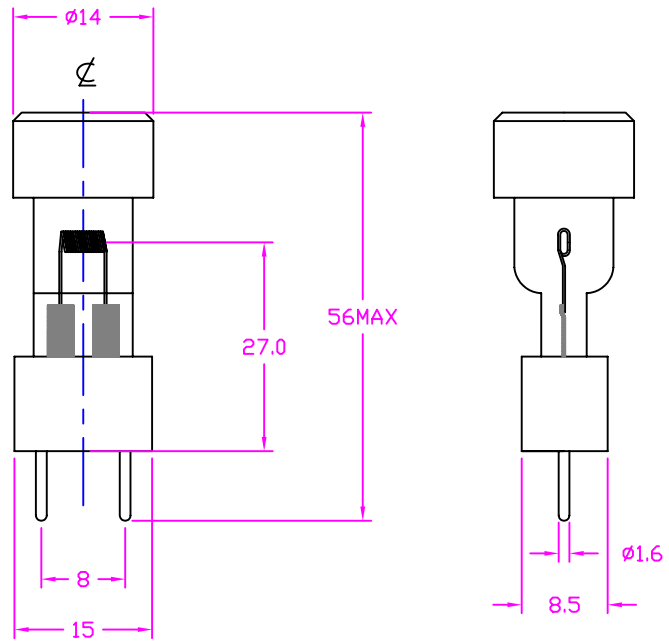

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS			
VOLTAGE	24 V		
WATTAGE	75 ±5 W		
TOTAL LUMEN	1750 ±240 Lm		
BASE TYPE	G8		
AVERAGE LIFE	100 HRS	NEXT ASSY	USED ON
FILAMENT TYPE	C-BAR-6	APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS						
LIST OF MATERIALS											
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630 TITLE SM-B401029 JC24V-75W							
DECIMALS .X ± -		APPROVALS									
.XX ± -		DATE									
.XXX ± -											
ANGLES ± -		DRAWN		DSGN ACTVY GOV'T ACTVY							
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		R.AMPARO				03/21/00					
MATERIAL		CHKD				D.GILCZYNSKI		03/21/00			
COMPOSITE		ENGR									
FINISH		MFG				SIZE		CODE IDENT NO.		DWG NO.	
						B				8000317	
						SCALE		WEIGHT		SHEET	
						NONE				1 OF 1	

D
C
B

A

D
C
B

A

4

3

1

4

3

2

1

CAD